



(12) UK Patent (19) GB (11) 2 399 580 (13) B

(45) Date of publication: 25.05.2005

(54) Title of the invention: Mono-diameter wellbore casing

(51) Int Cl⁷: E21B 43/10

(21) Application No: 0411893.1

(22) Date of Filing: 11.01.2002

Date Lodged: 27.05.2004

(30) Priority Data:

(31) 60262434 (32) 17.01.2001 (33) US

(62) Divided from Application No

0314846.7 under Section 15(4) of the Patents Act 1977

(43) Date A Publication: 22.09.2004

(72) Inventor(s):

Robert Lance Cook

Lev Ring

(73) Proprietor(s):

Enventure Global Technology

(Incorporated in USA - Delaware)

16200 A Park Row, Houston, Texas 77084,

United States of America

(74) Agent and/or Address for Service:

Haseltine Lake & Co

Imperial House, 15-19 Kingsway,

LONDON, WC2B 6UD, United Kingdom

(52) UK CL (Edition X):

E1F FLA

(56) Documents Cited:

GB 2368865 A

(58) Field of Search:

As for published application 2399580 A viz:

UK CL (Edition W) E1F

INT CL⁷ E21B

Other: Online: WPI, EPODOC, JAPIO

updated as appropriate

BEST AVAILABLE COPY

1/15

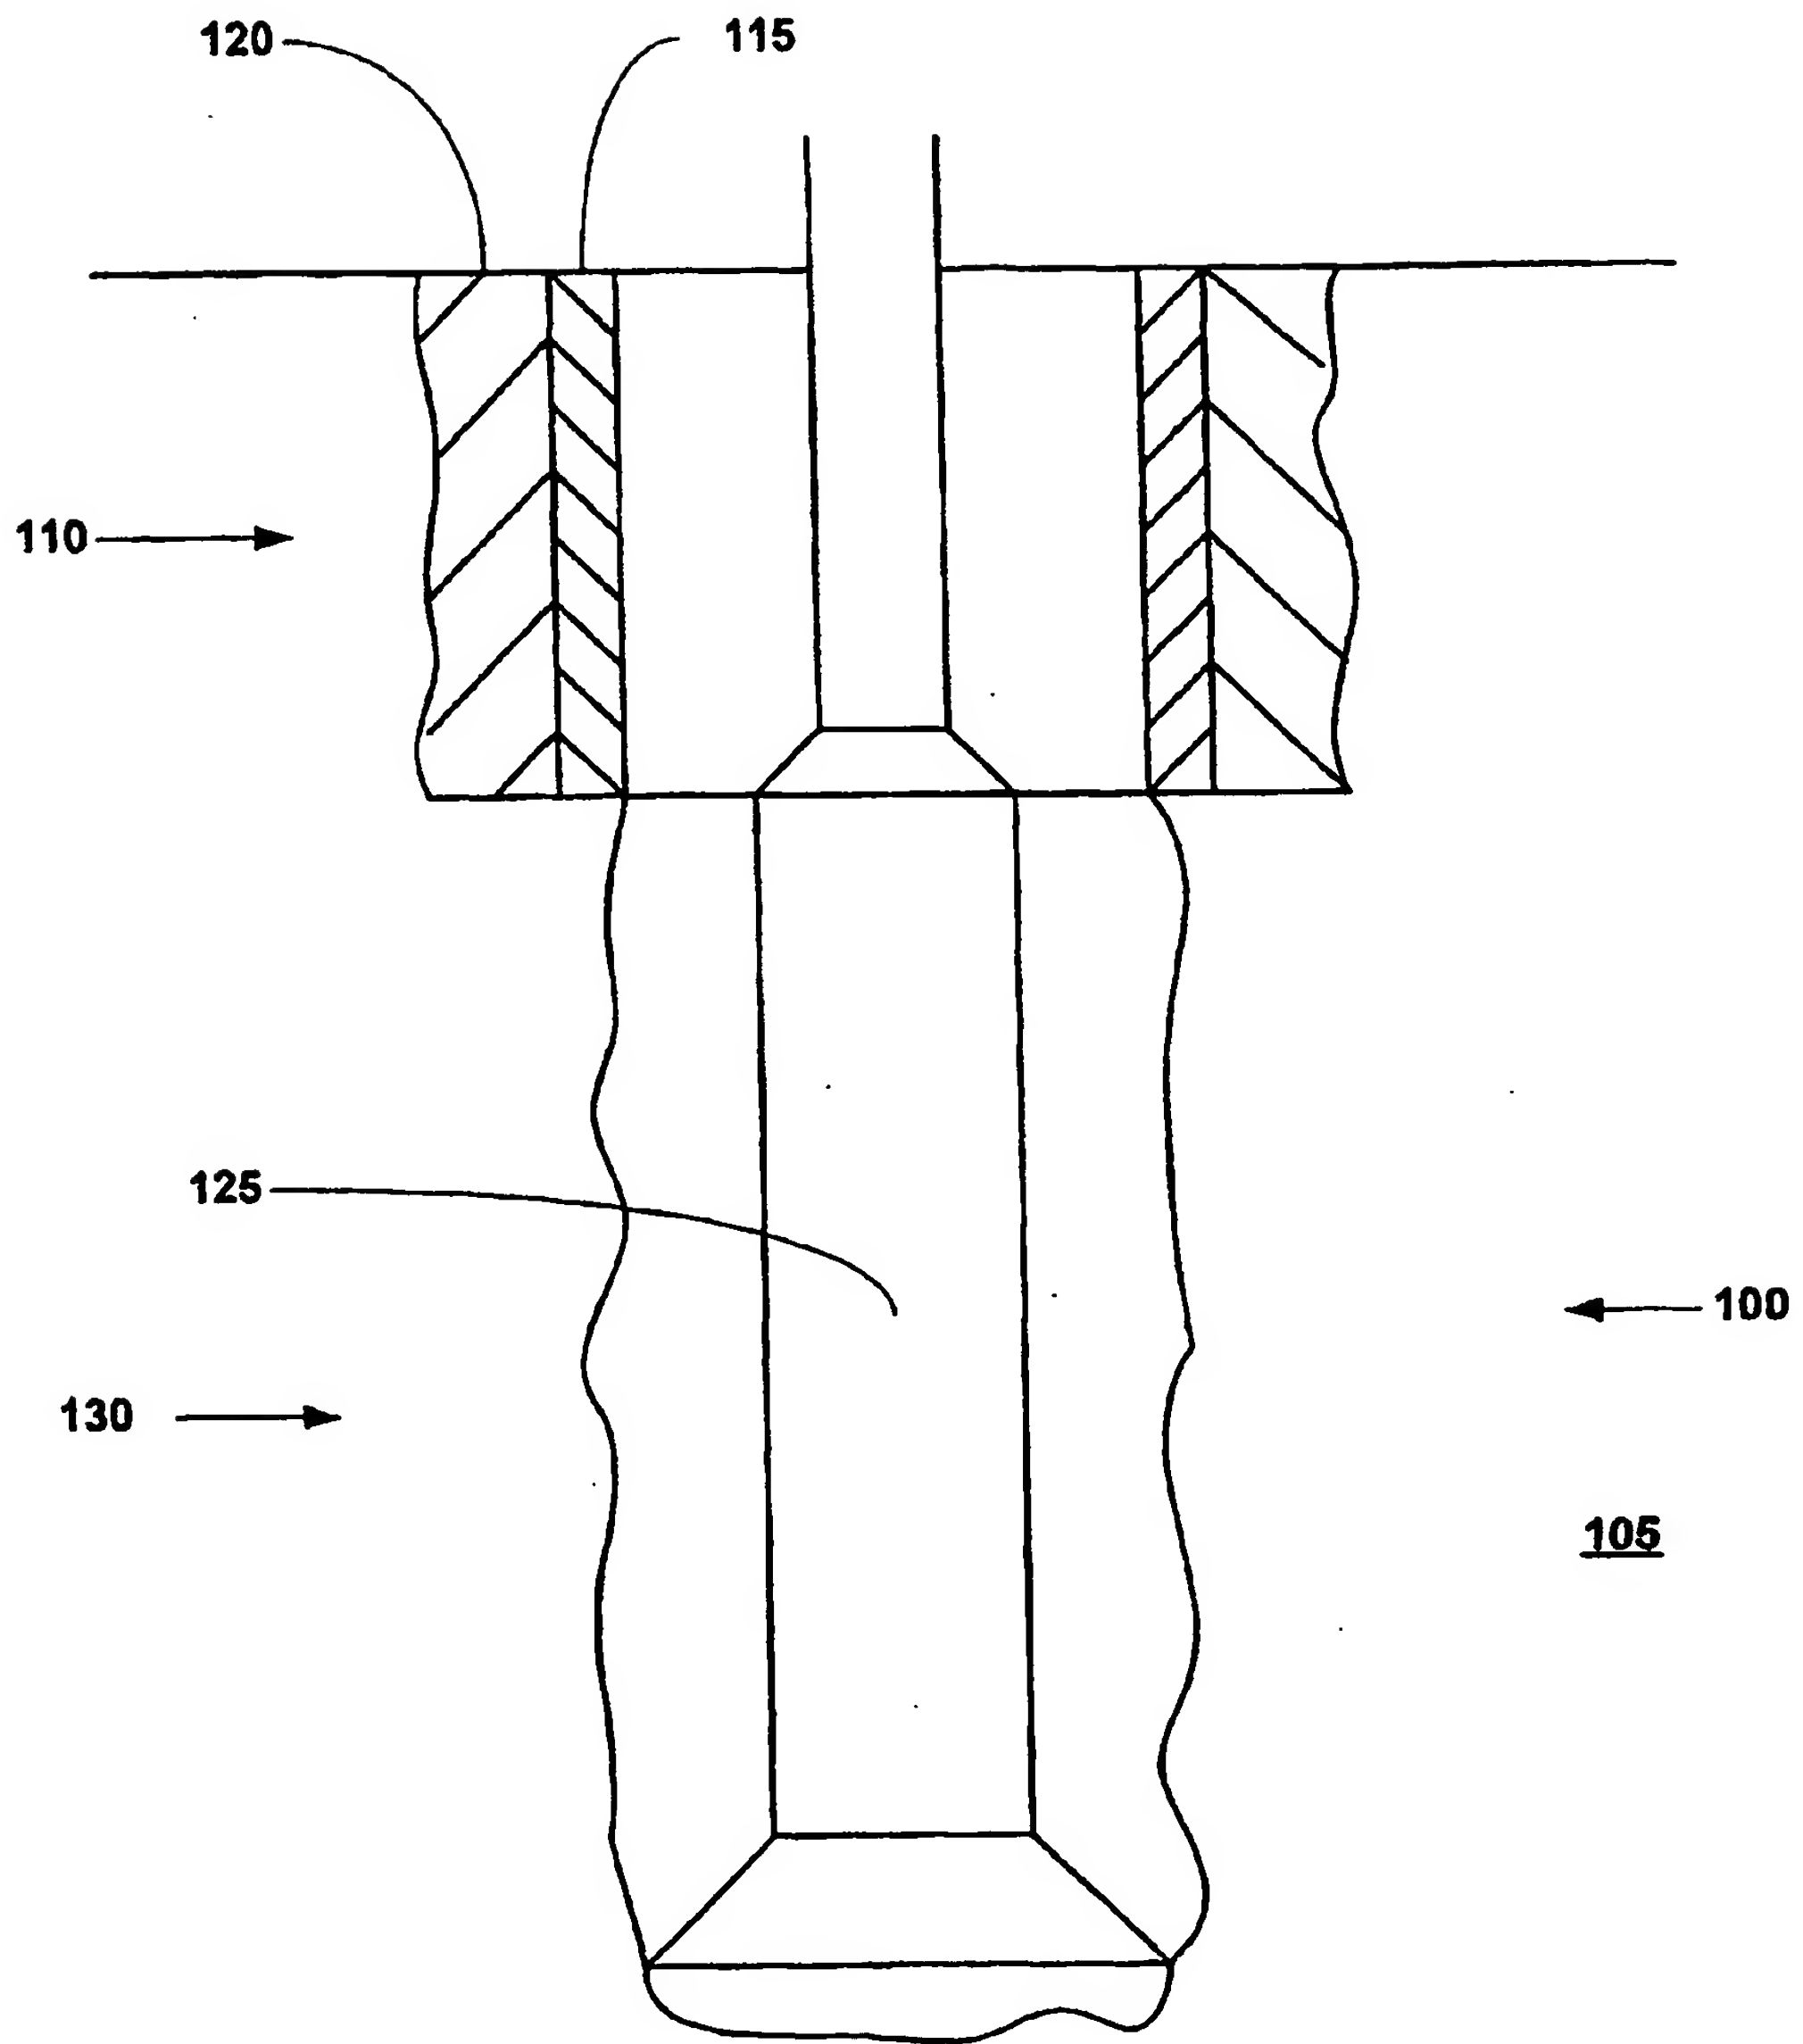


FIGURE 1

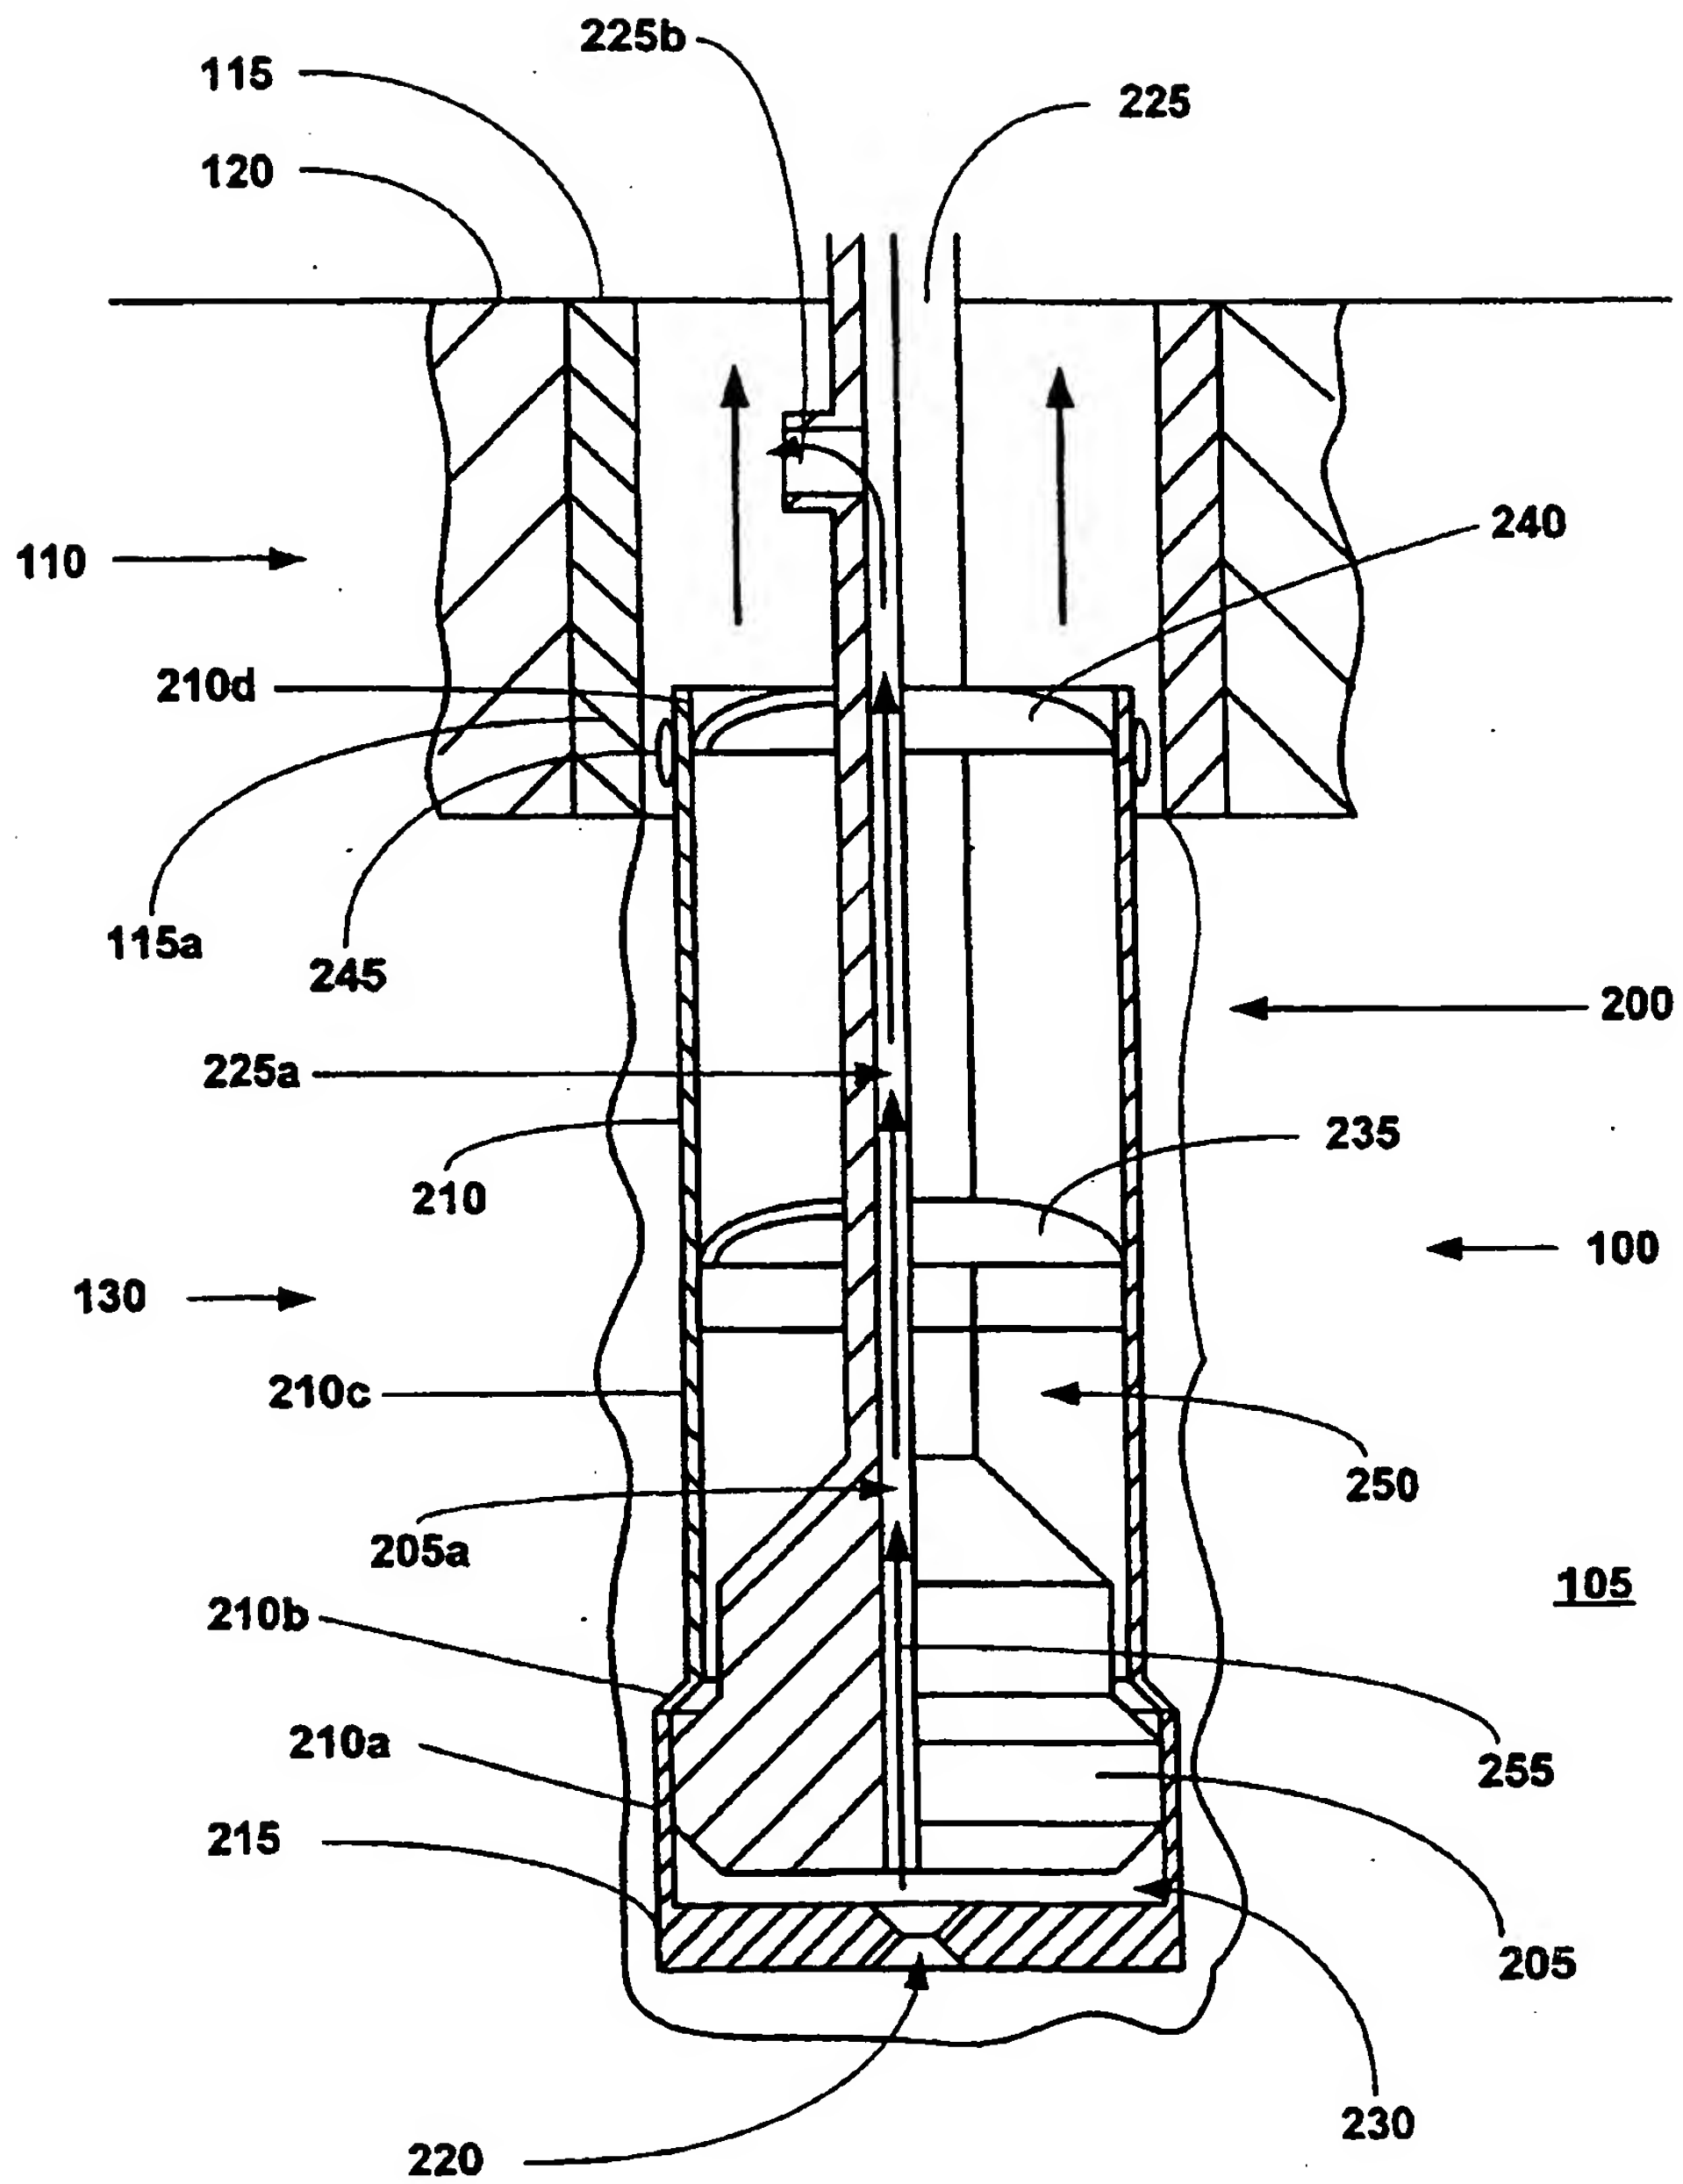


FIGURE 2

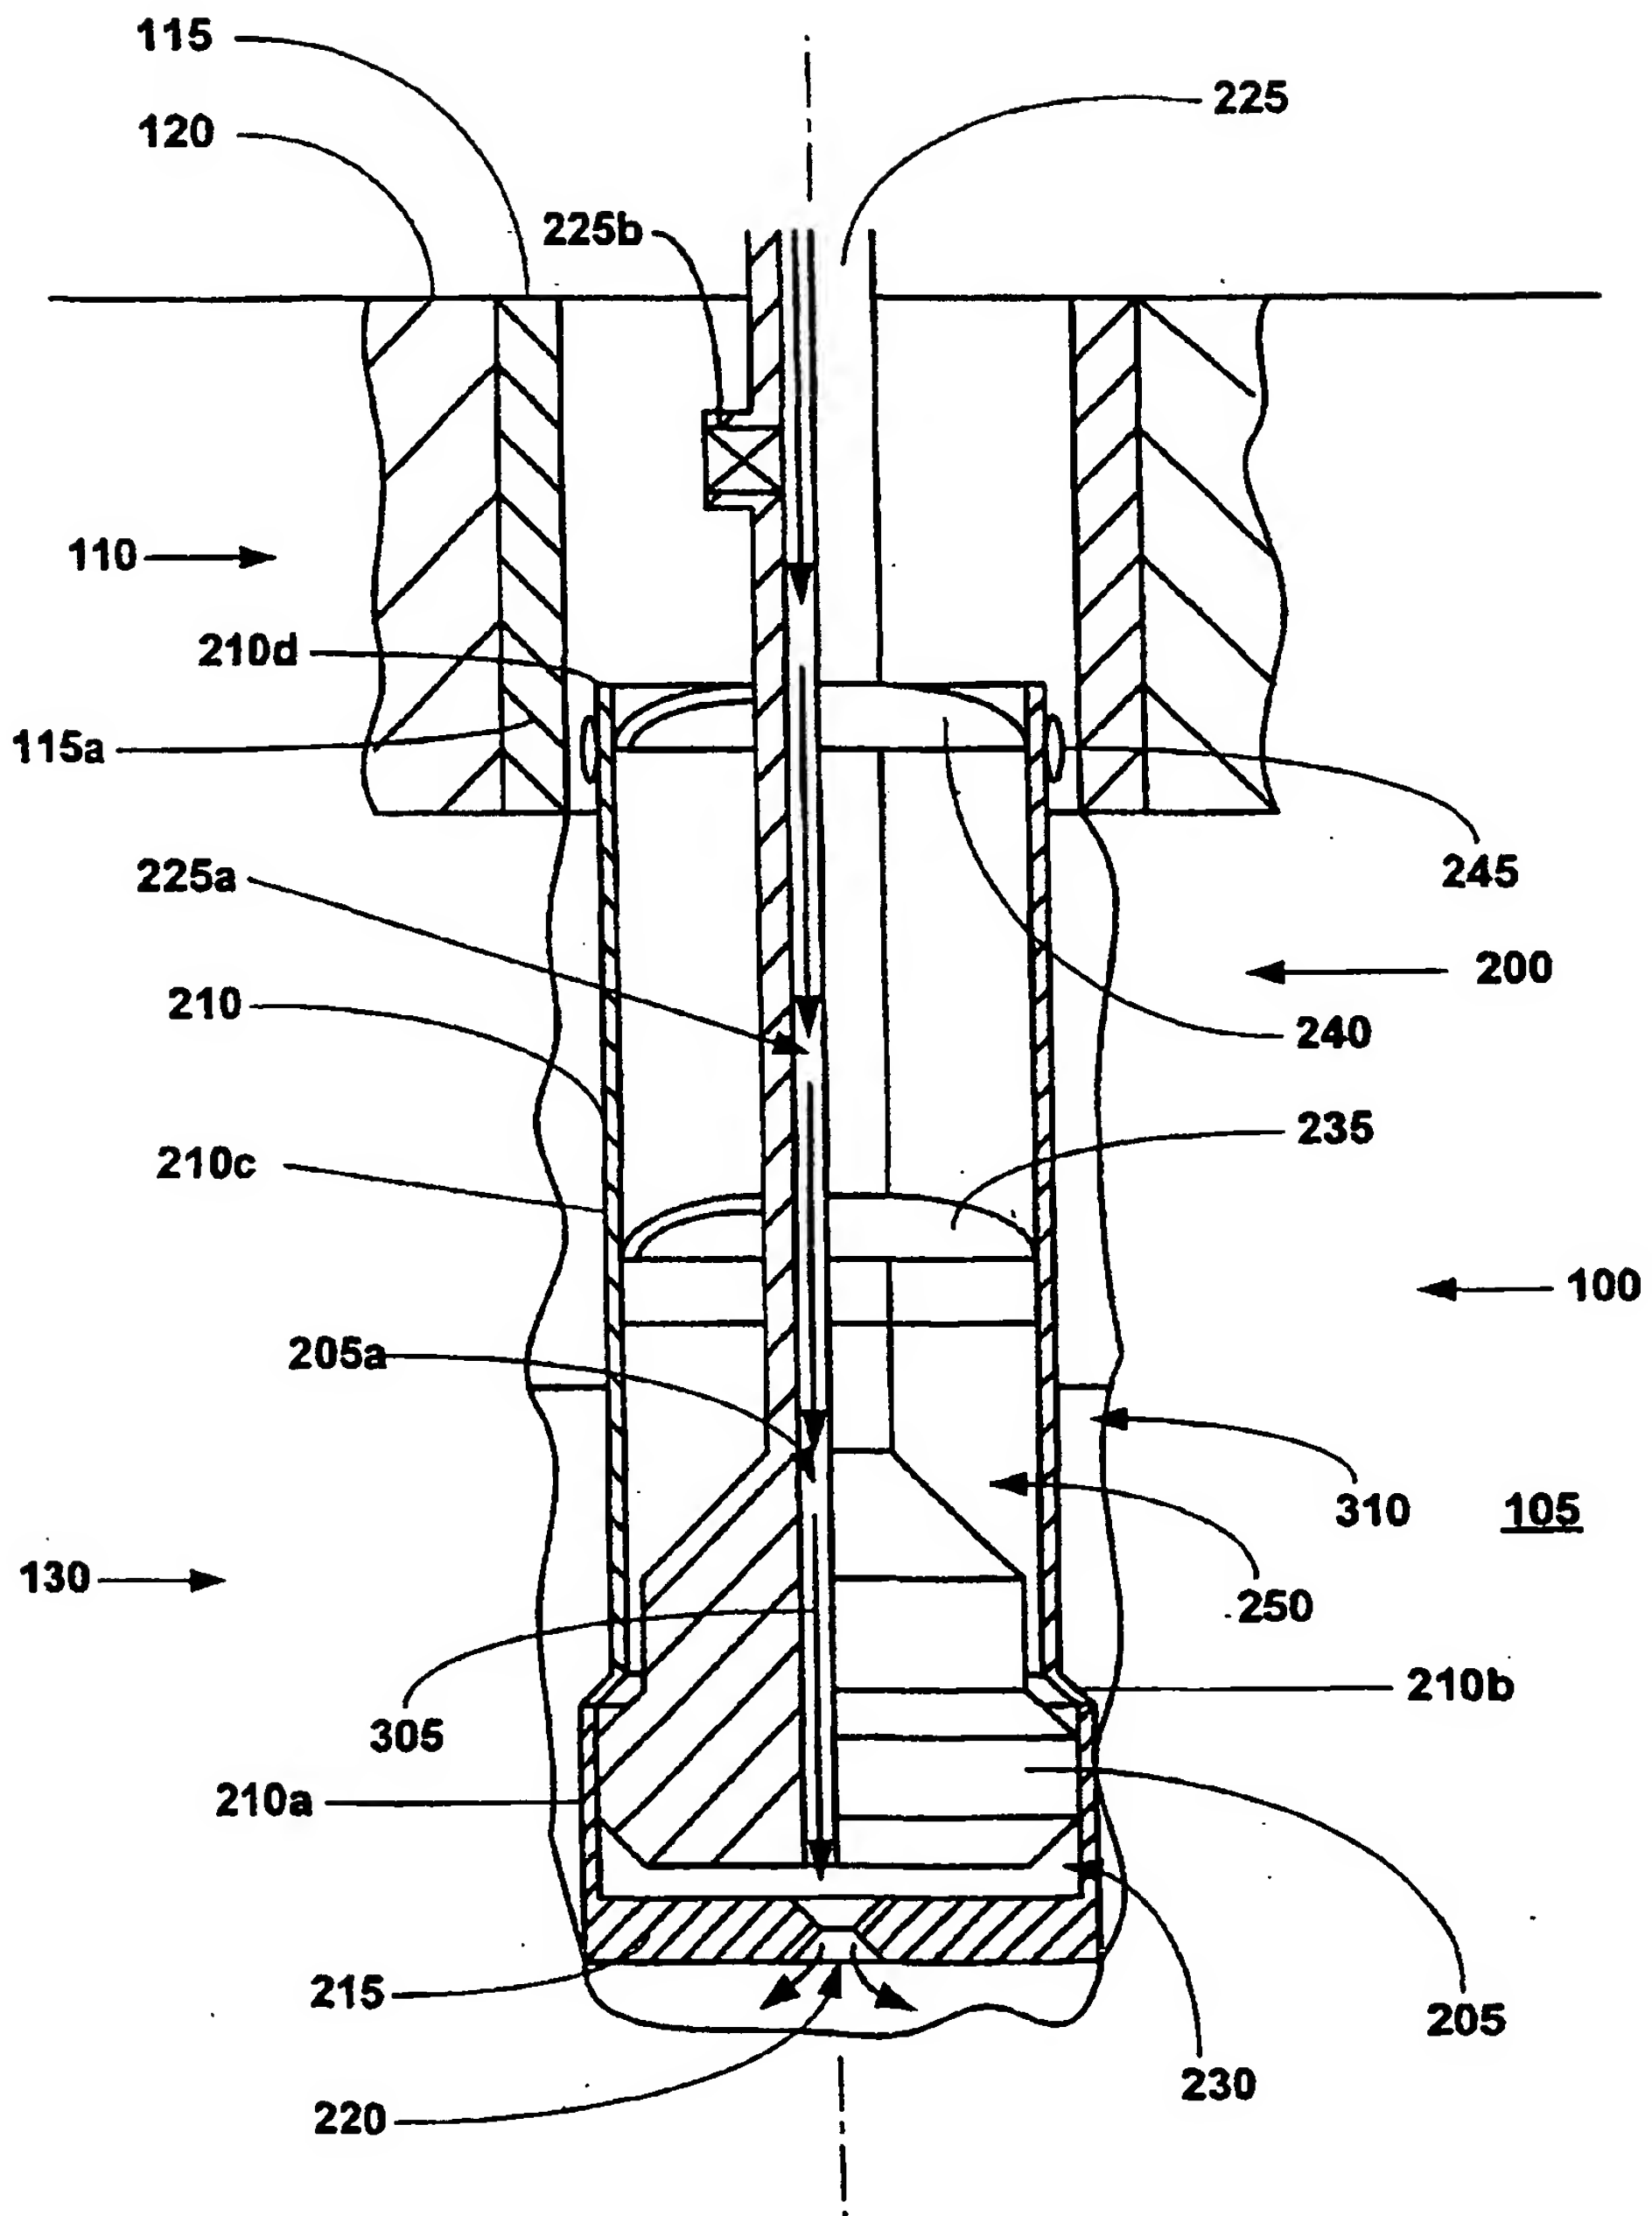


FIGURE 3

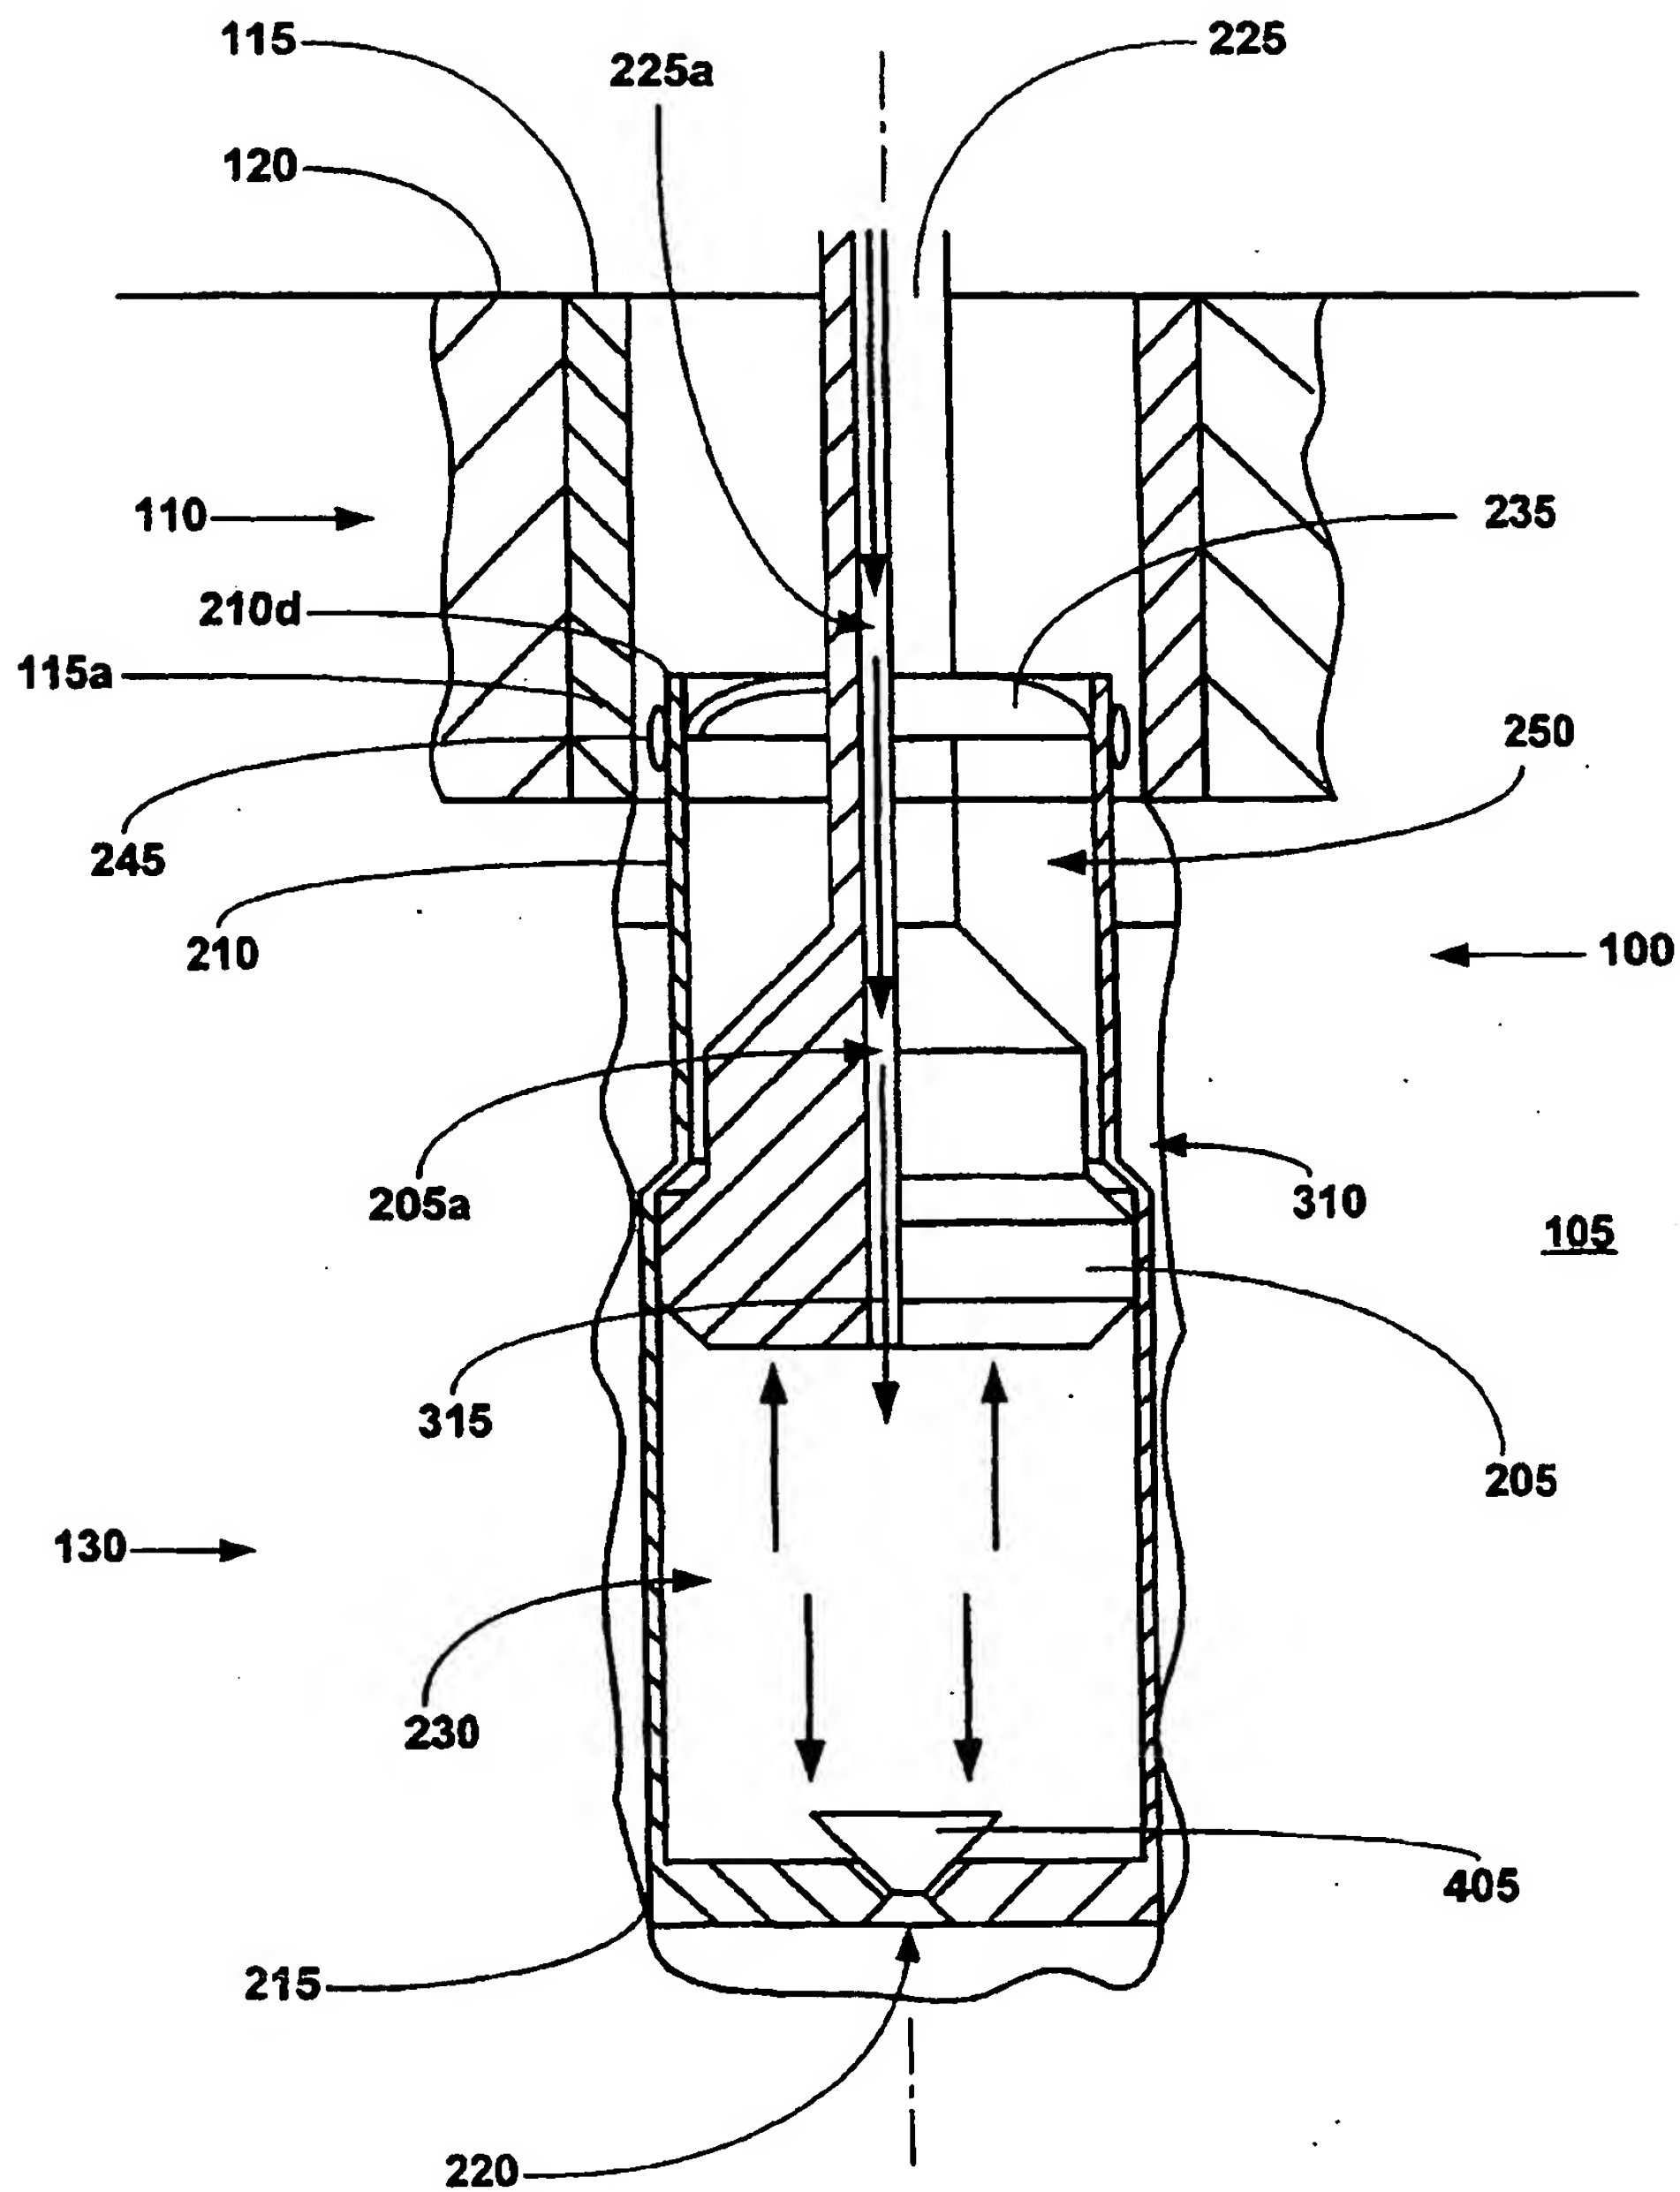


FIGURE 4

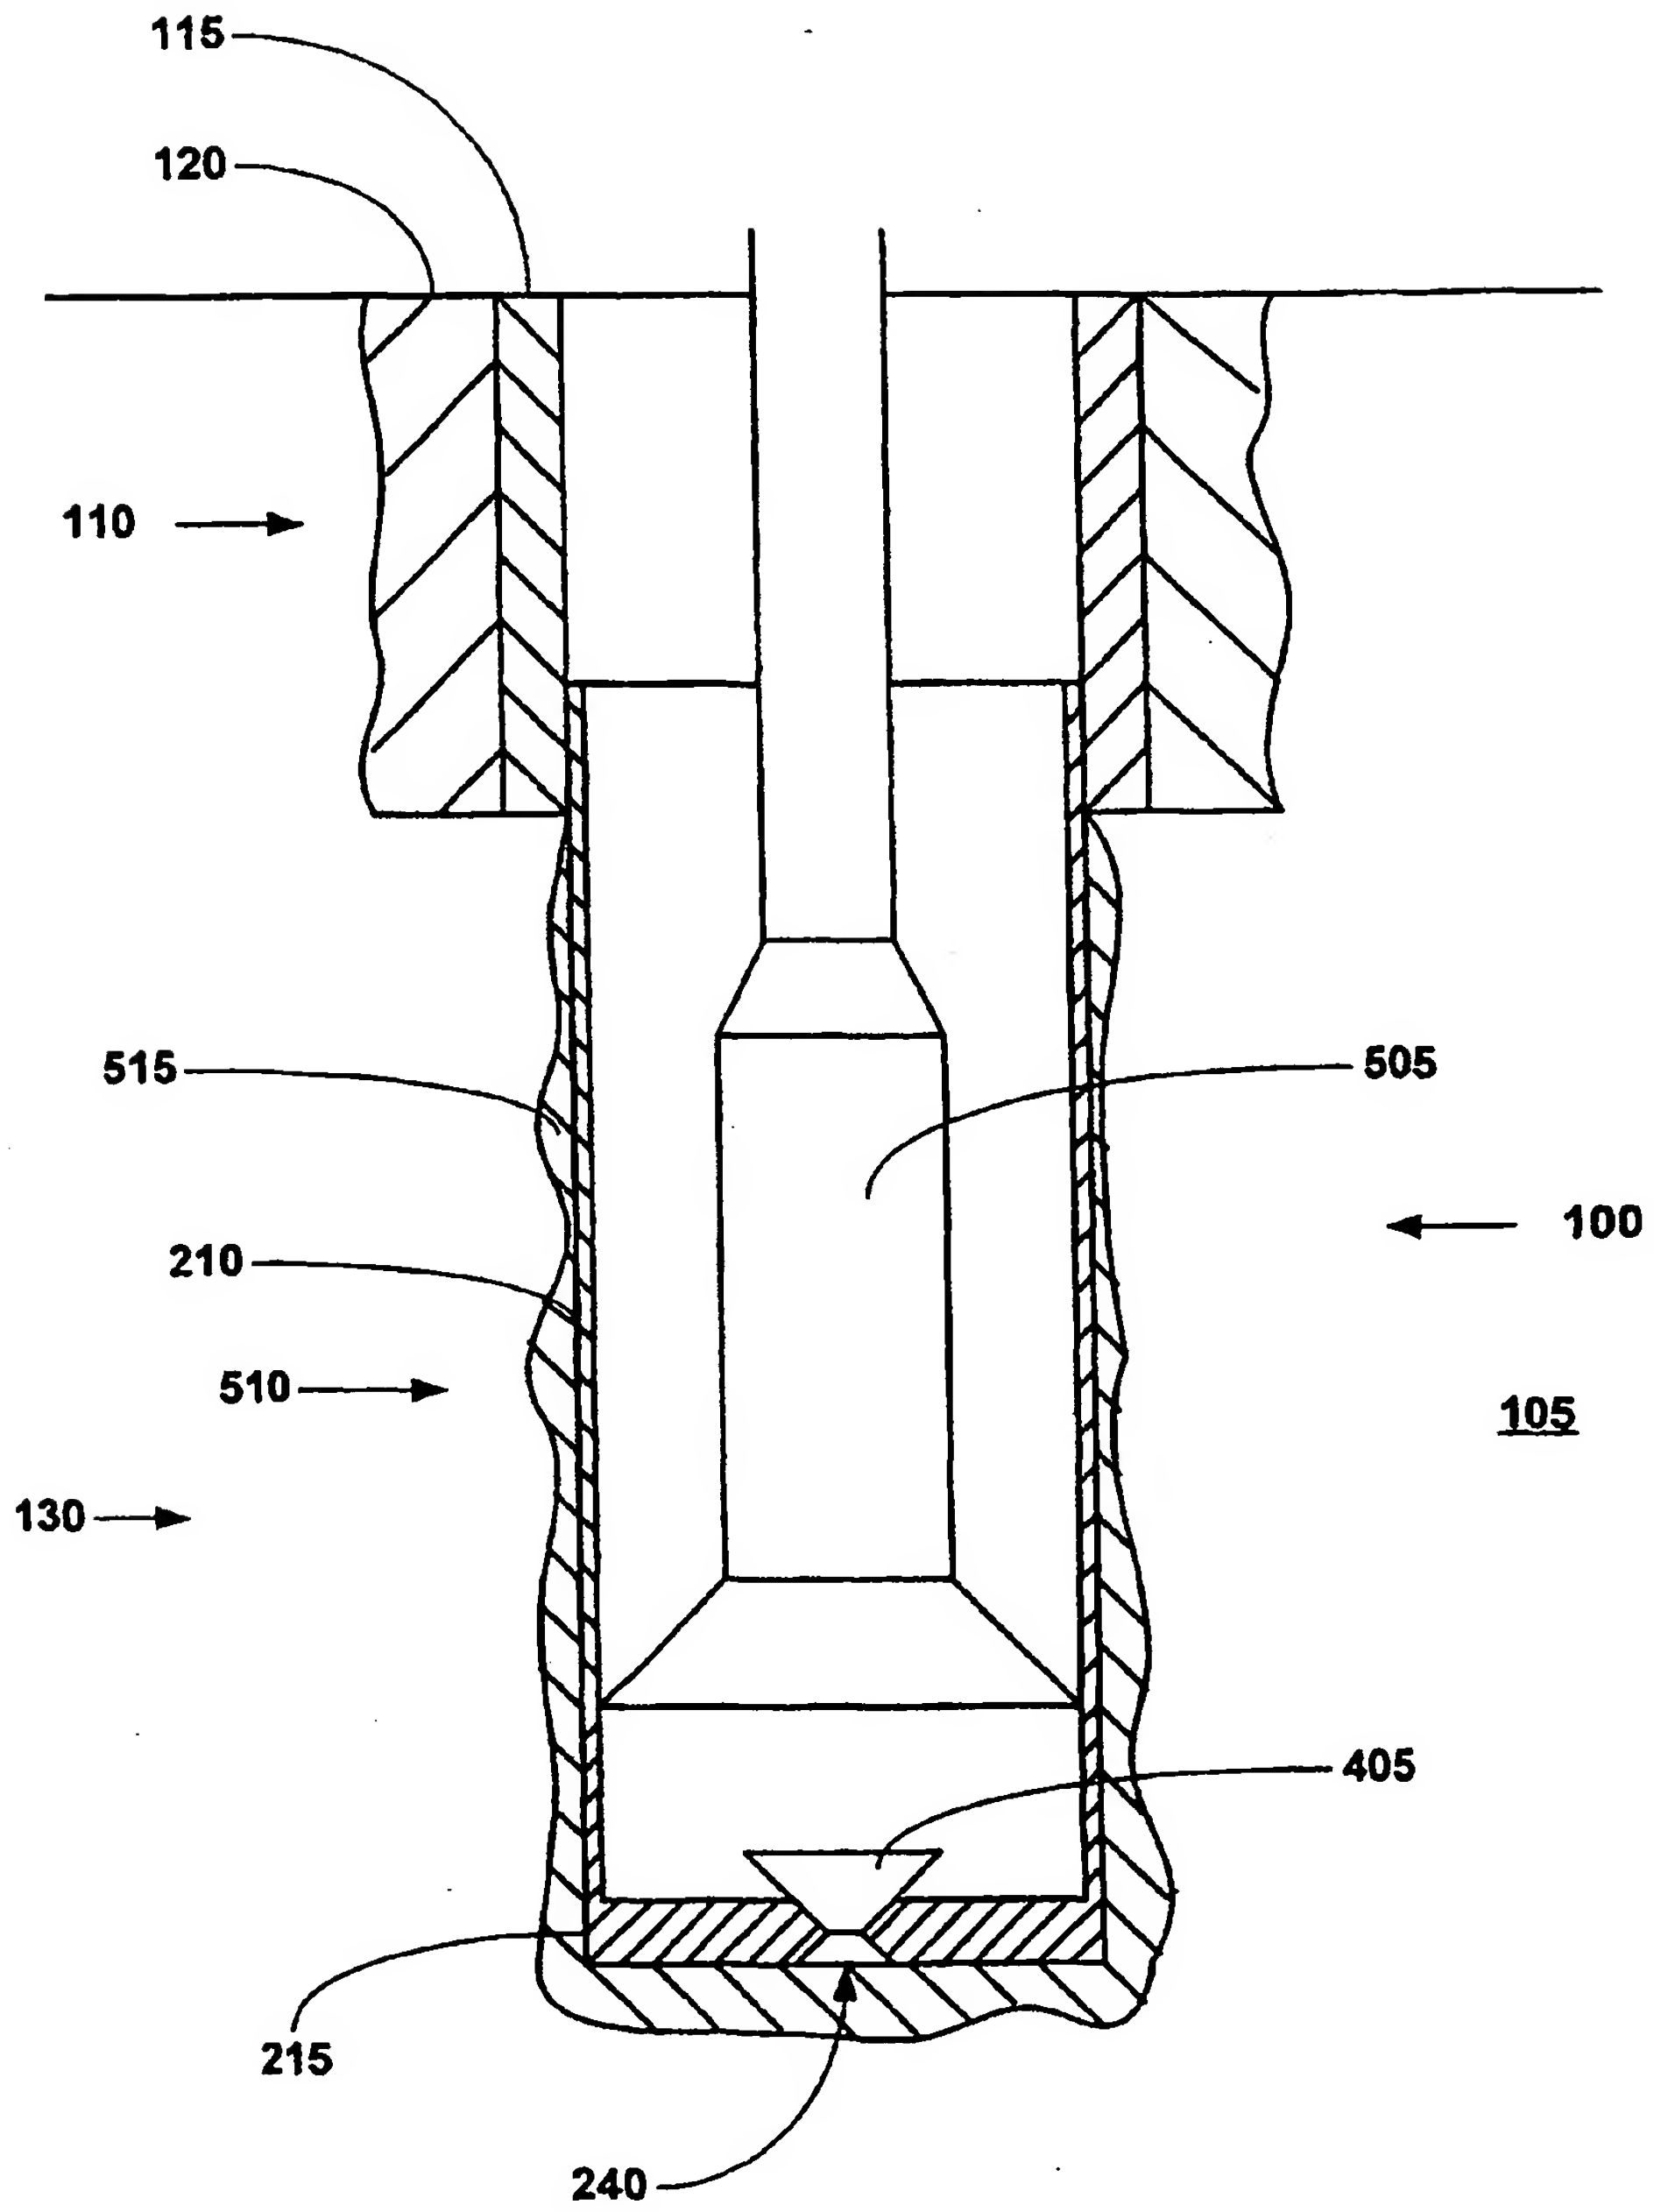


FIGURE 5

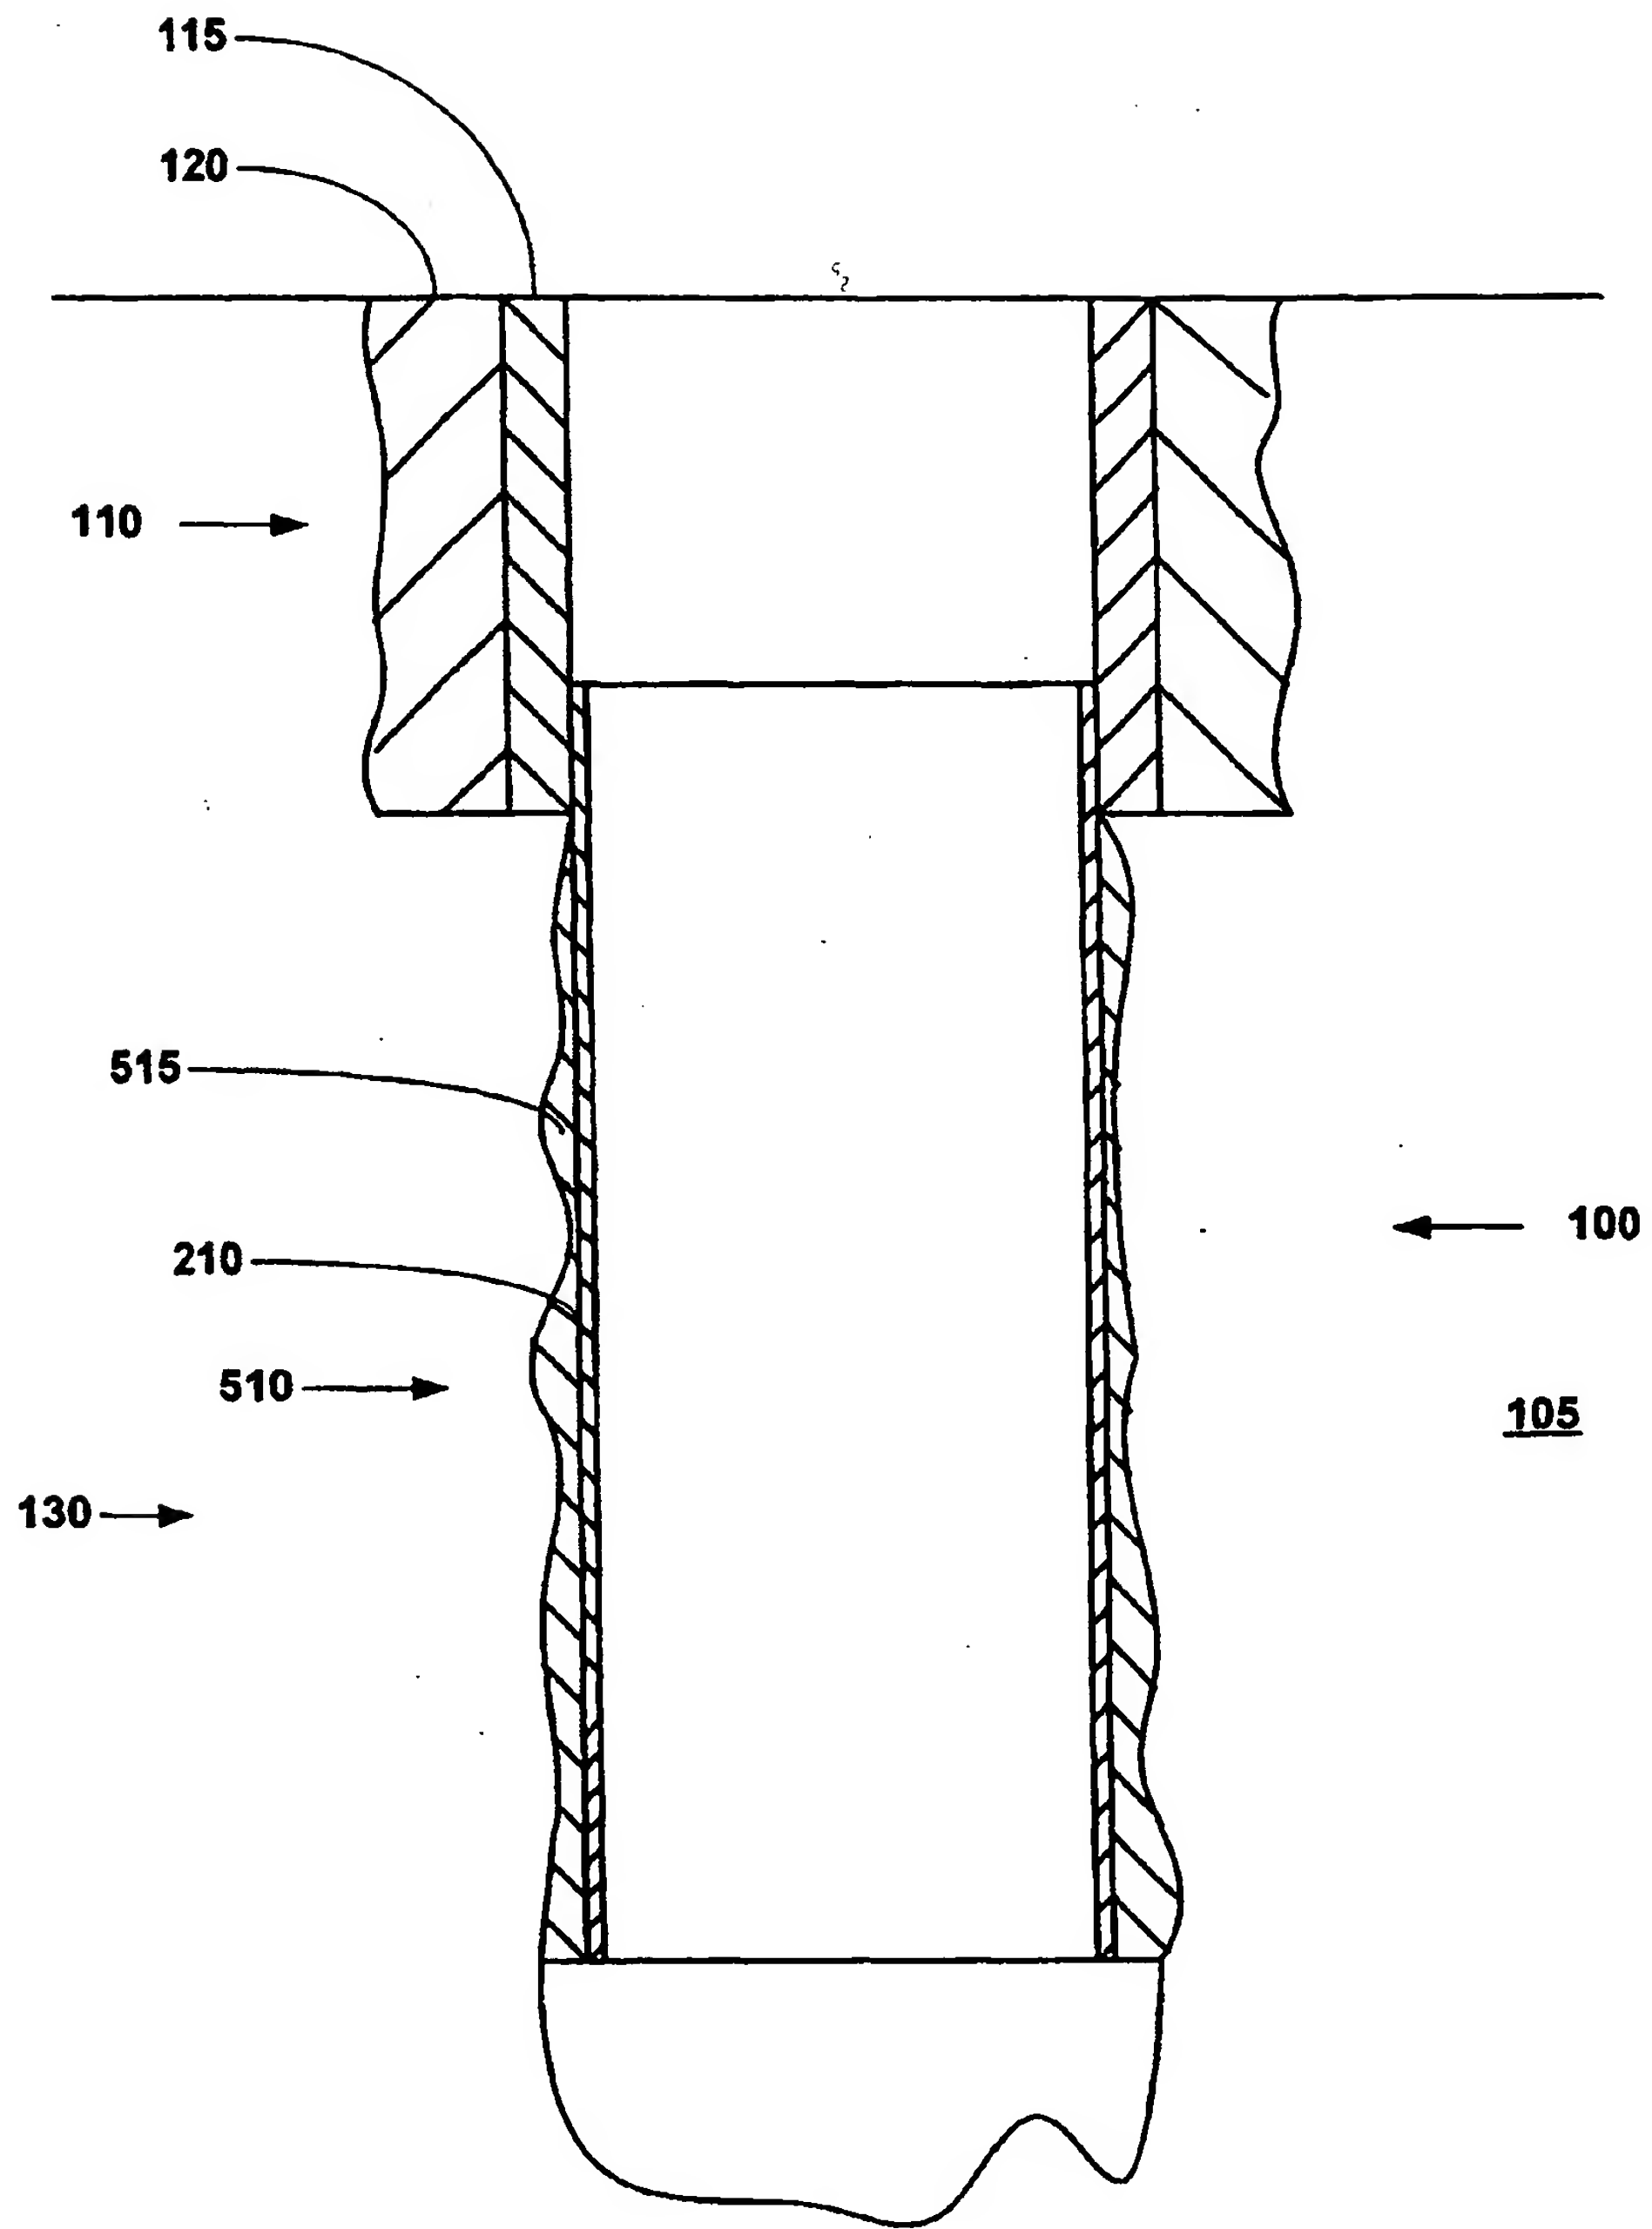


FIGURE 6

7/15

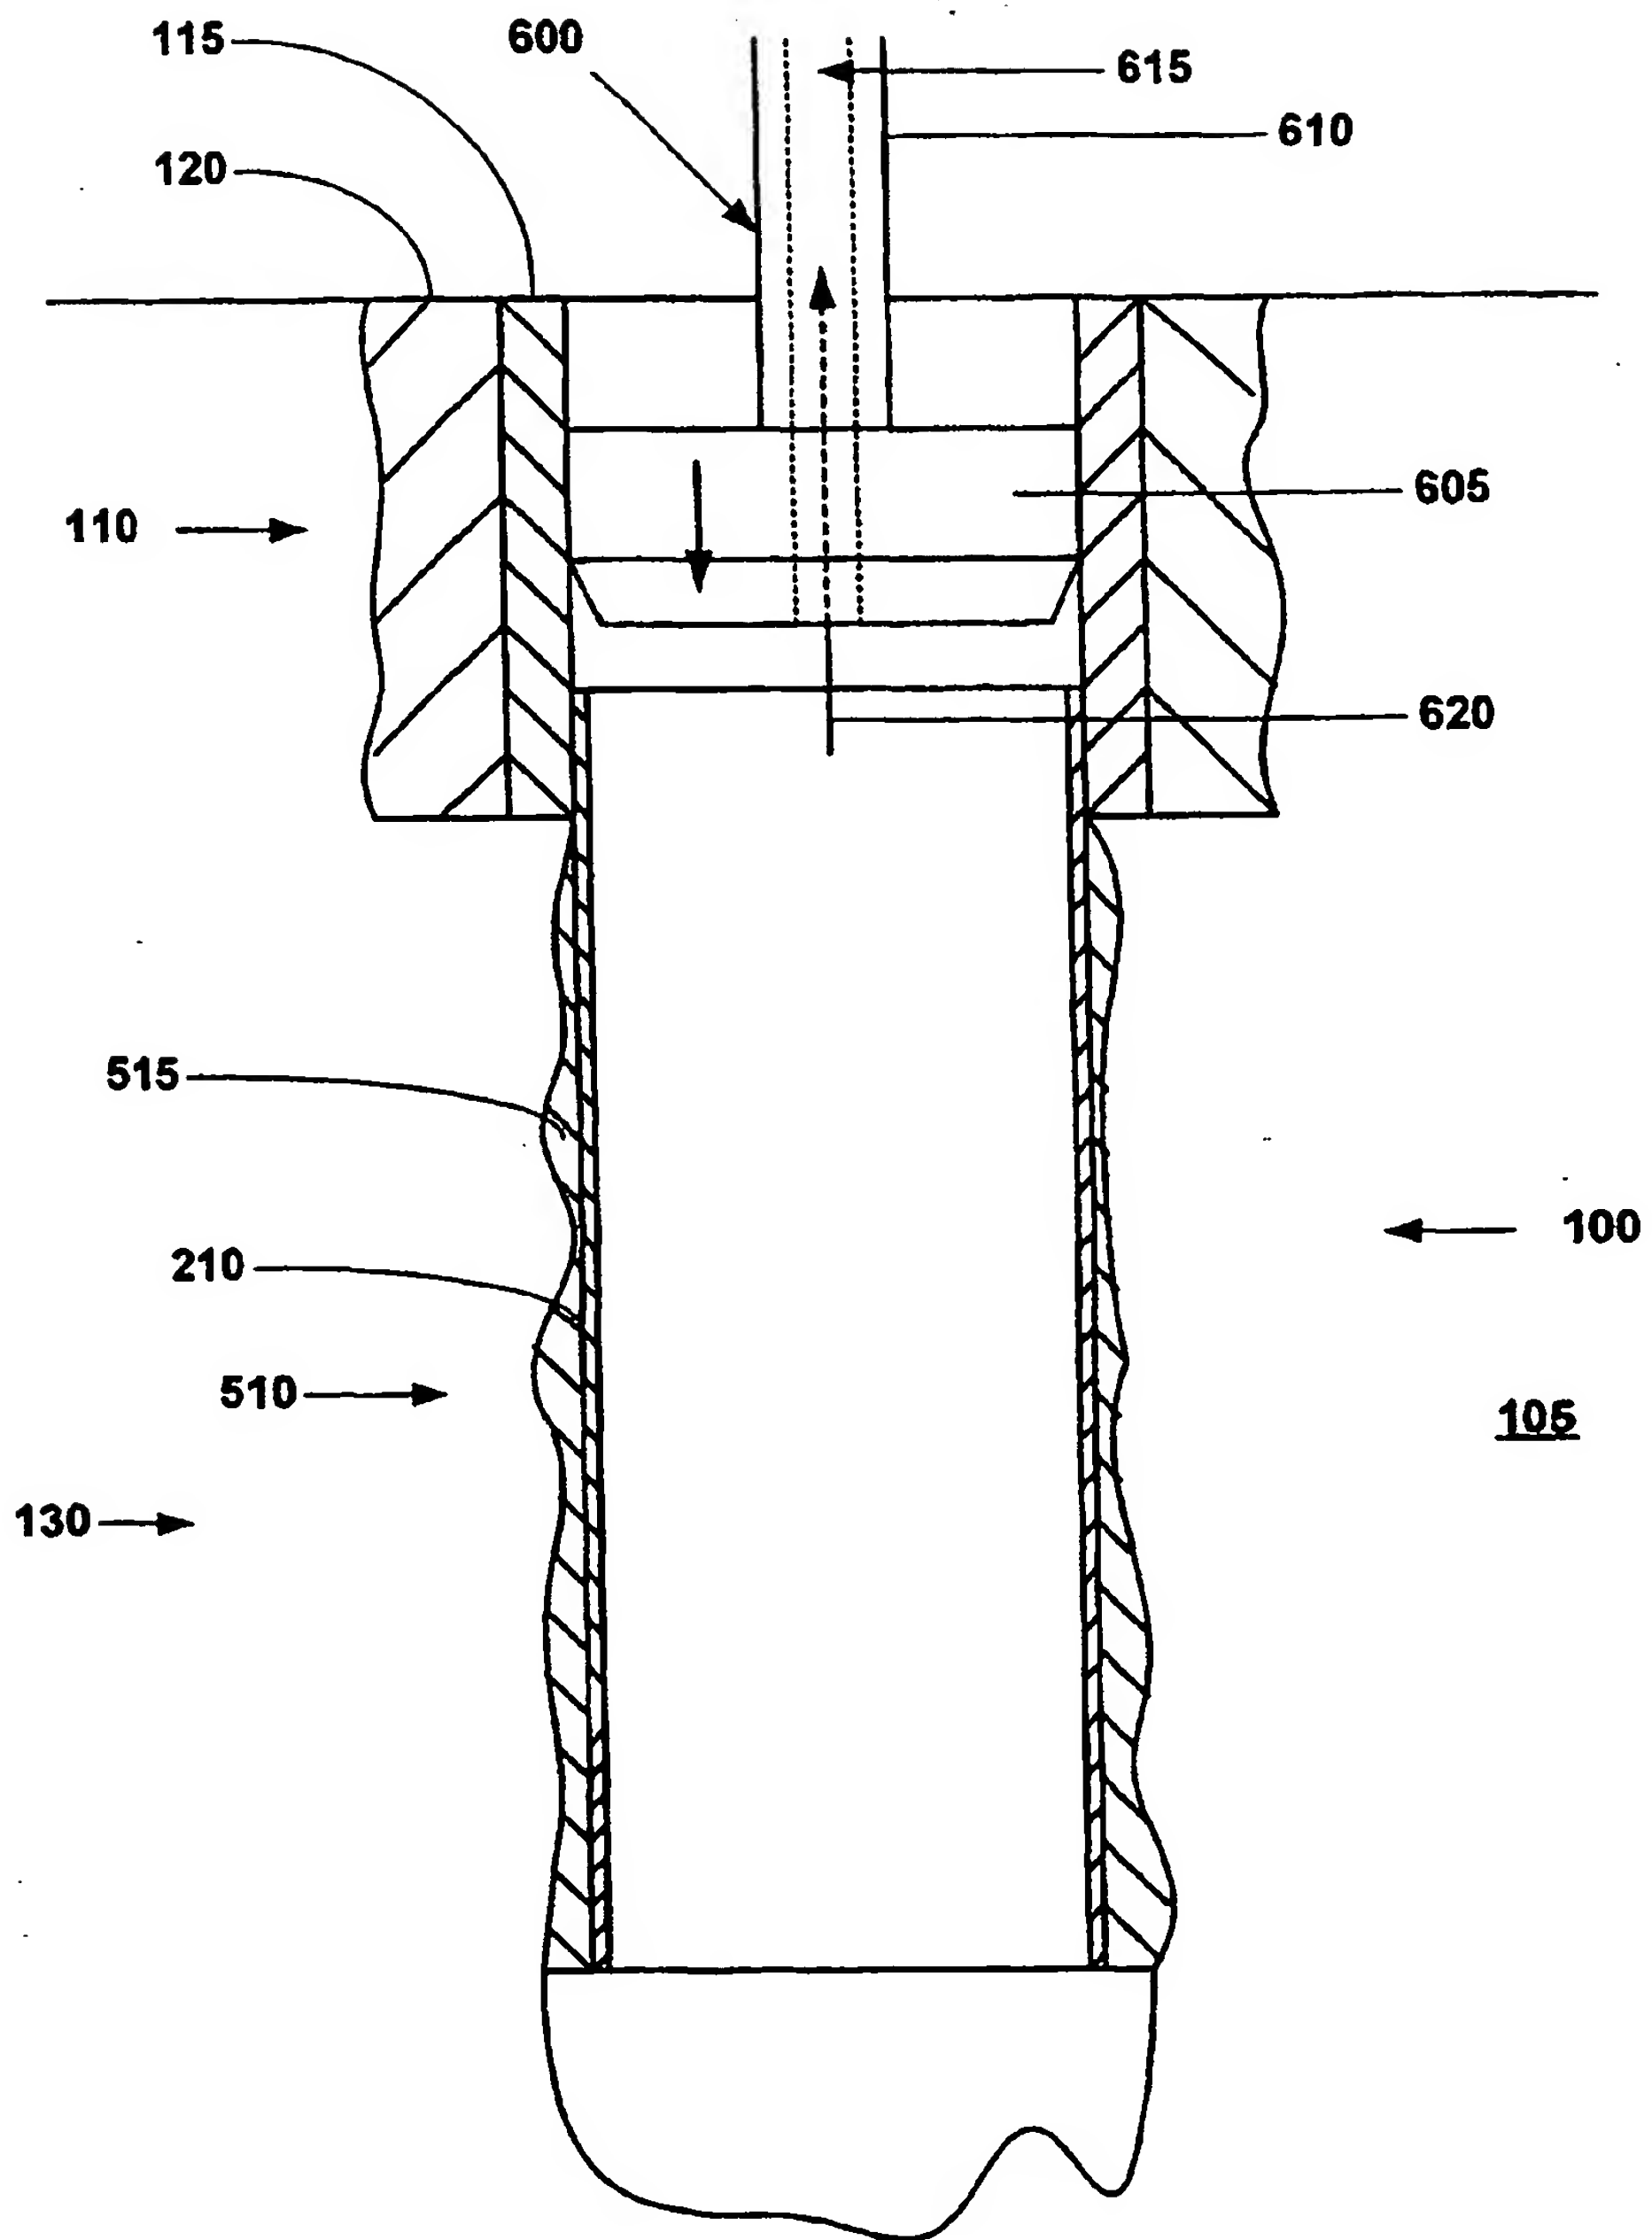


FIGURE 7

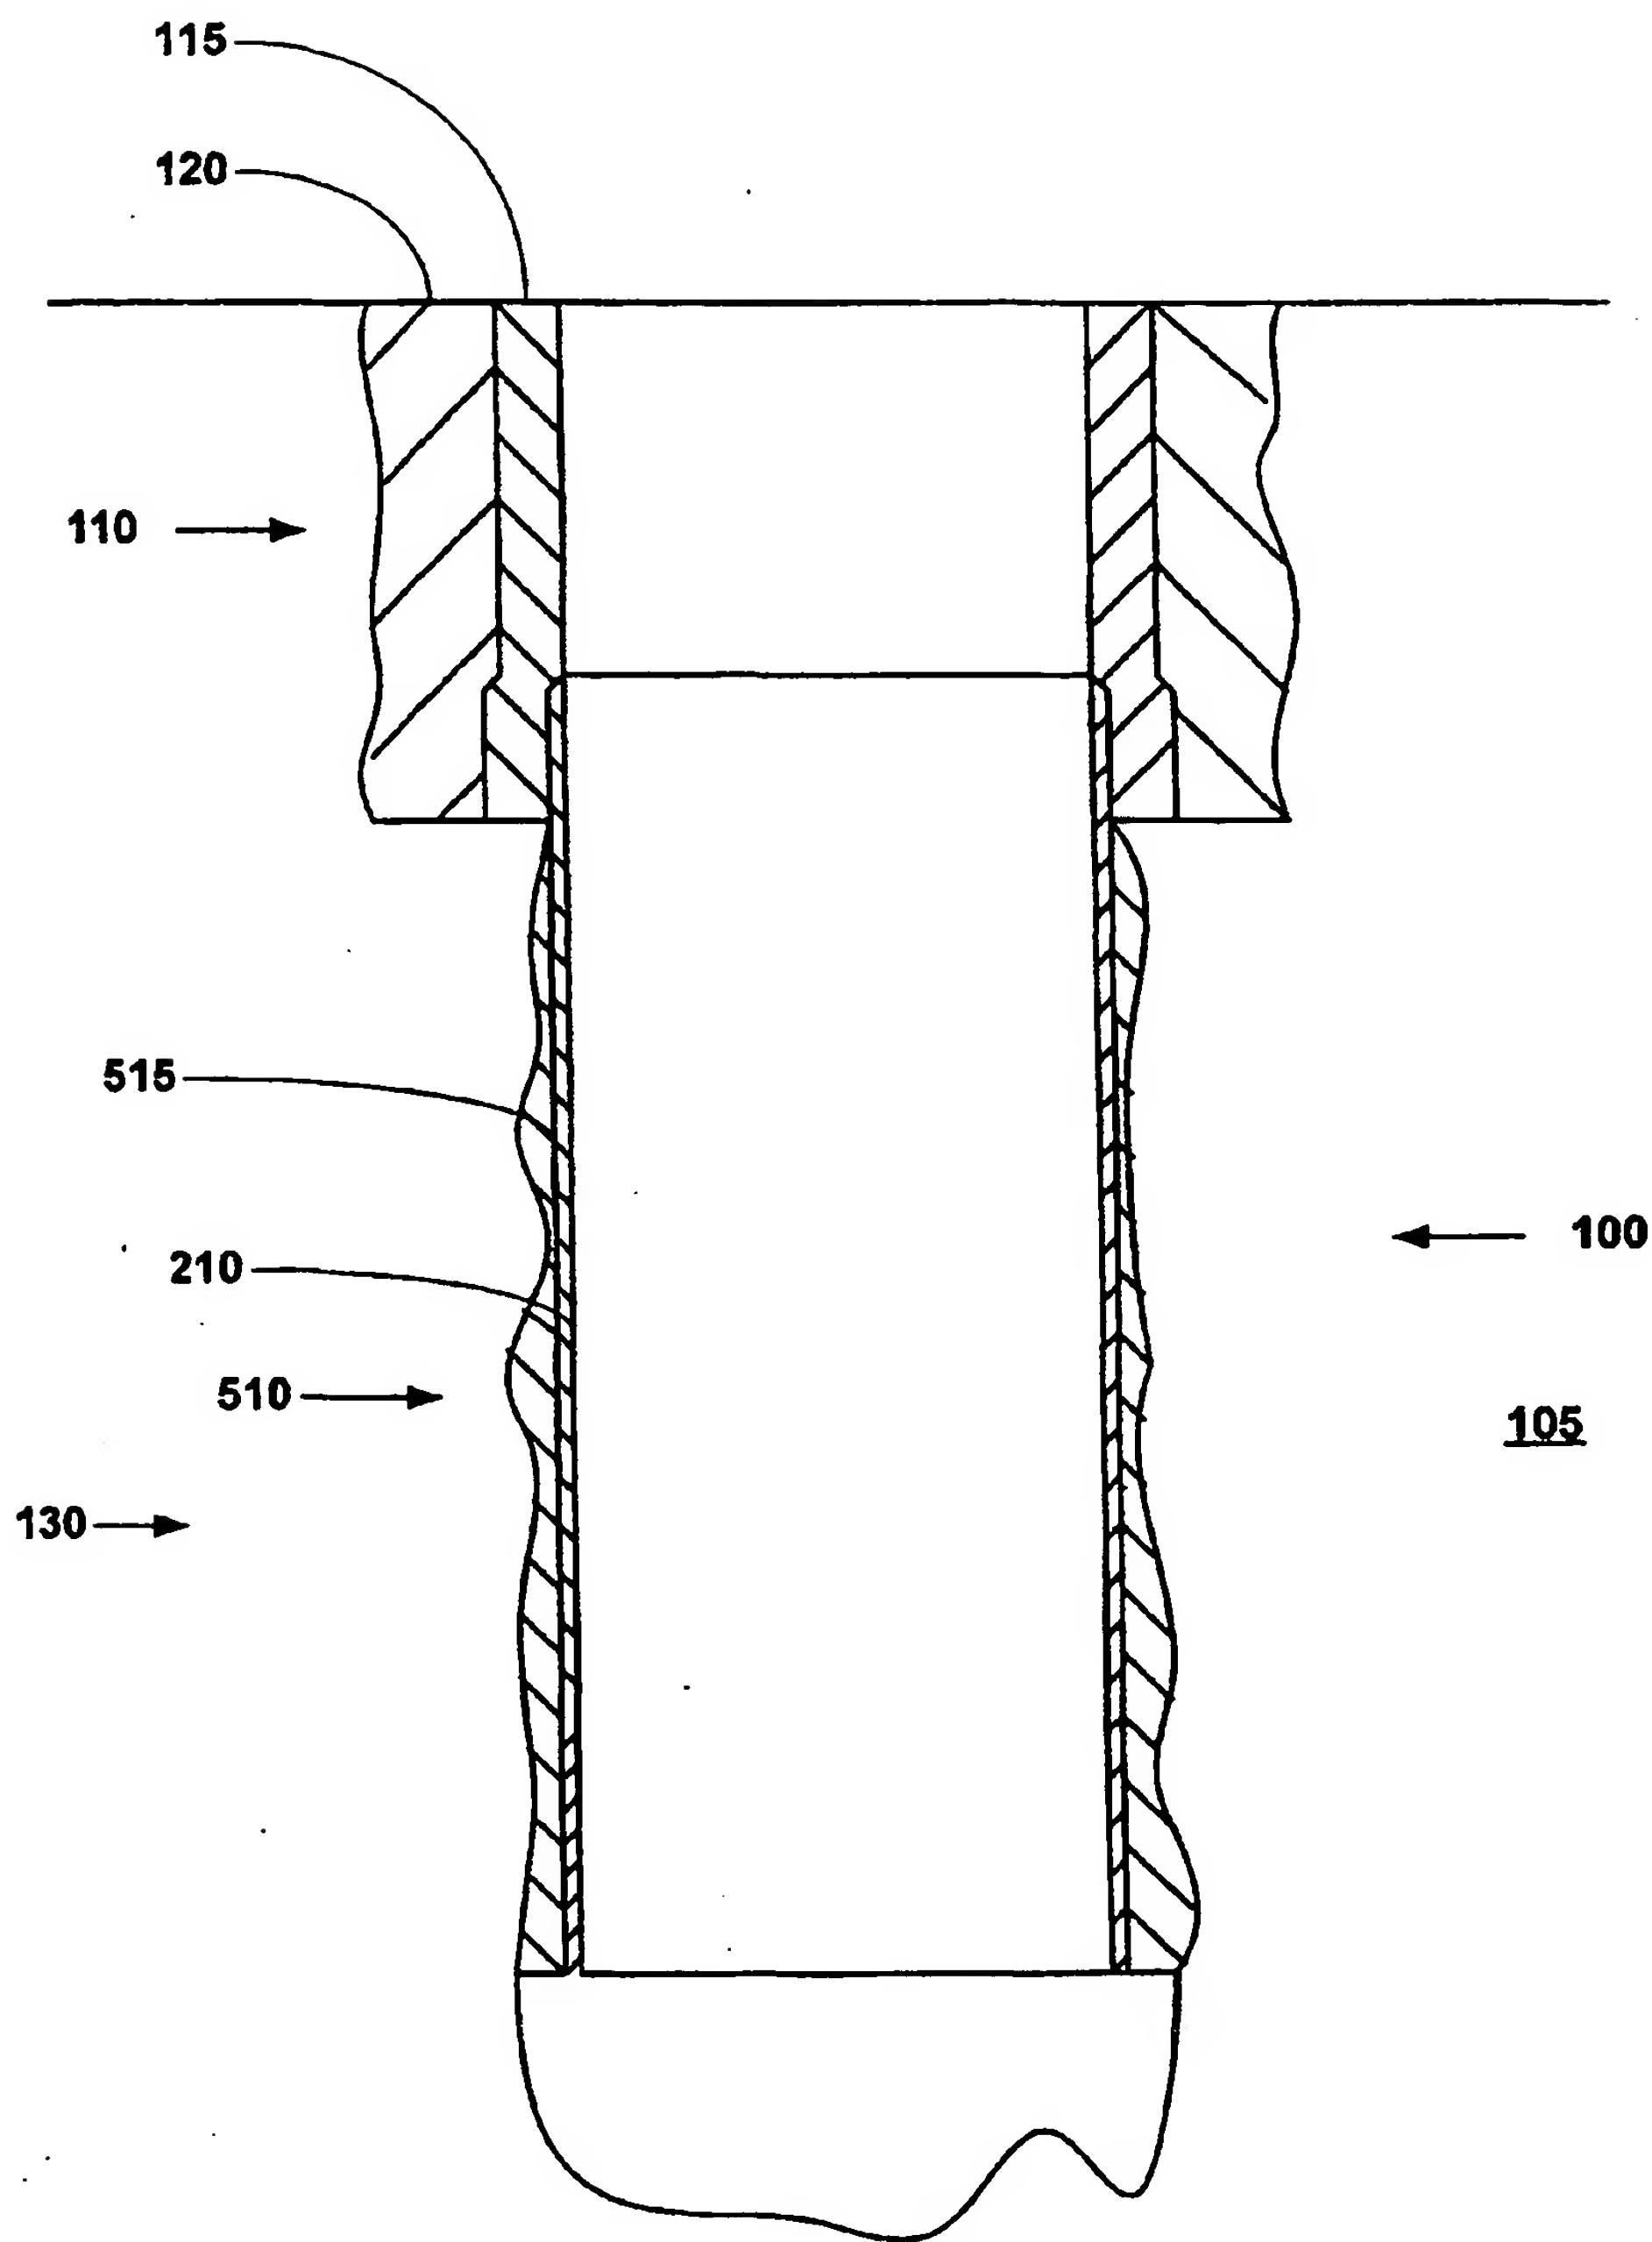


FIGURE 8

9/15

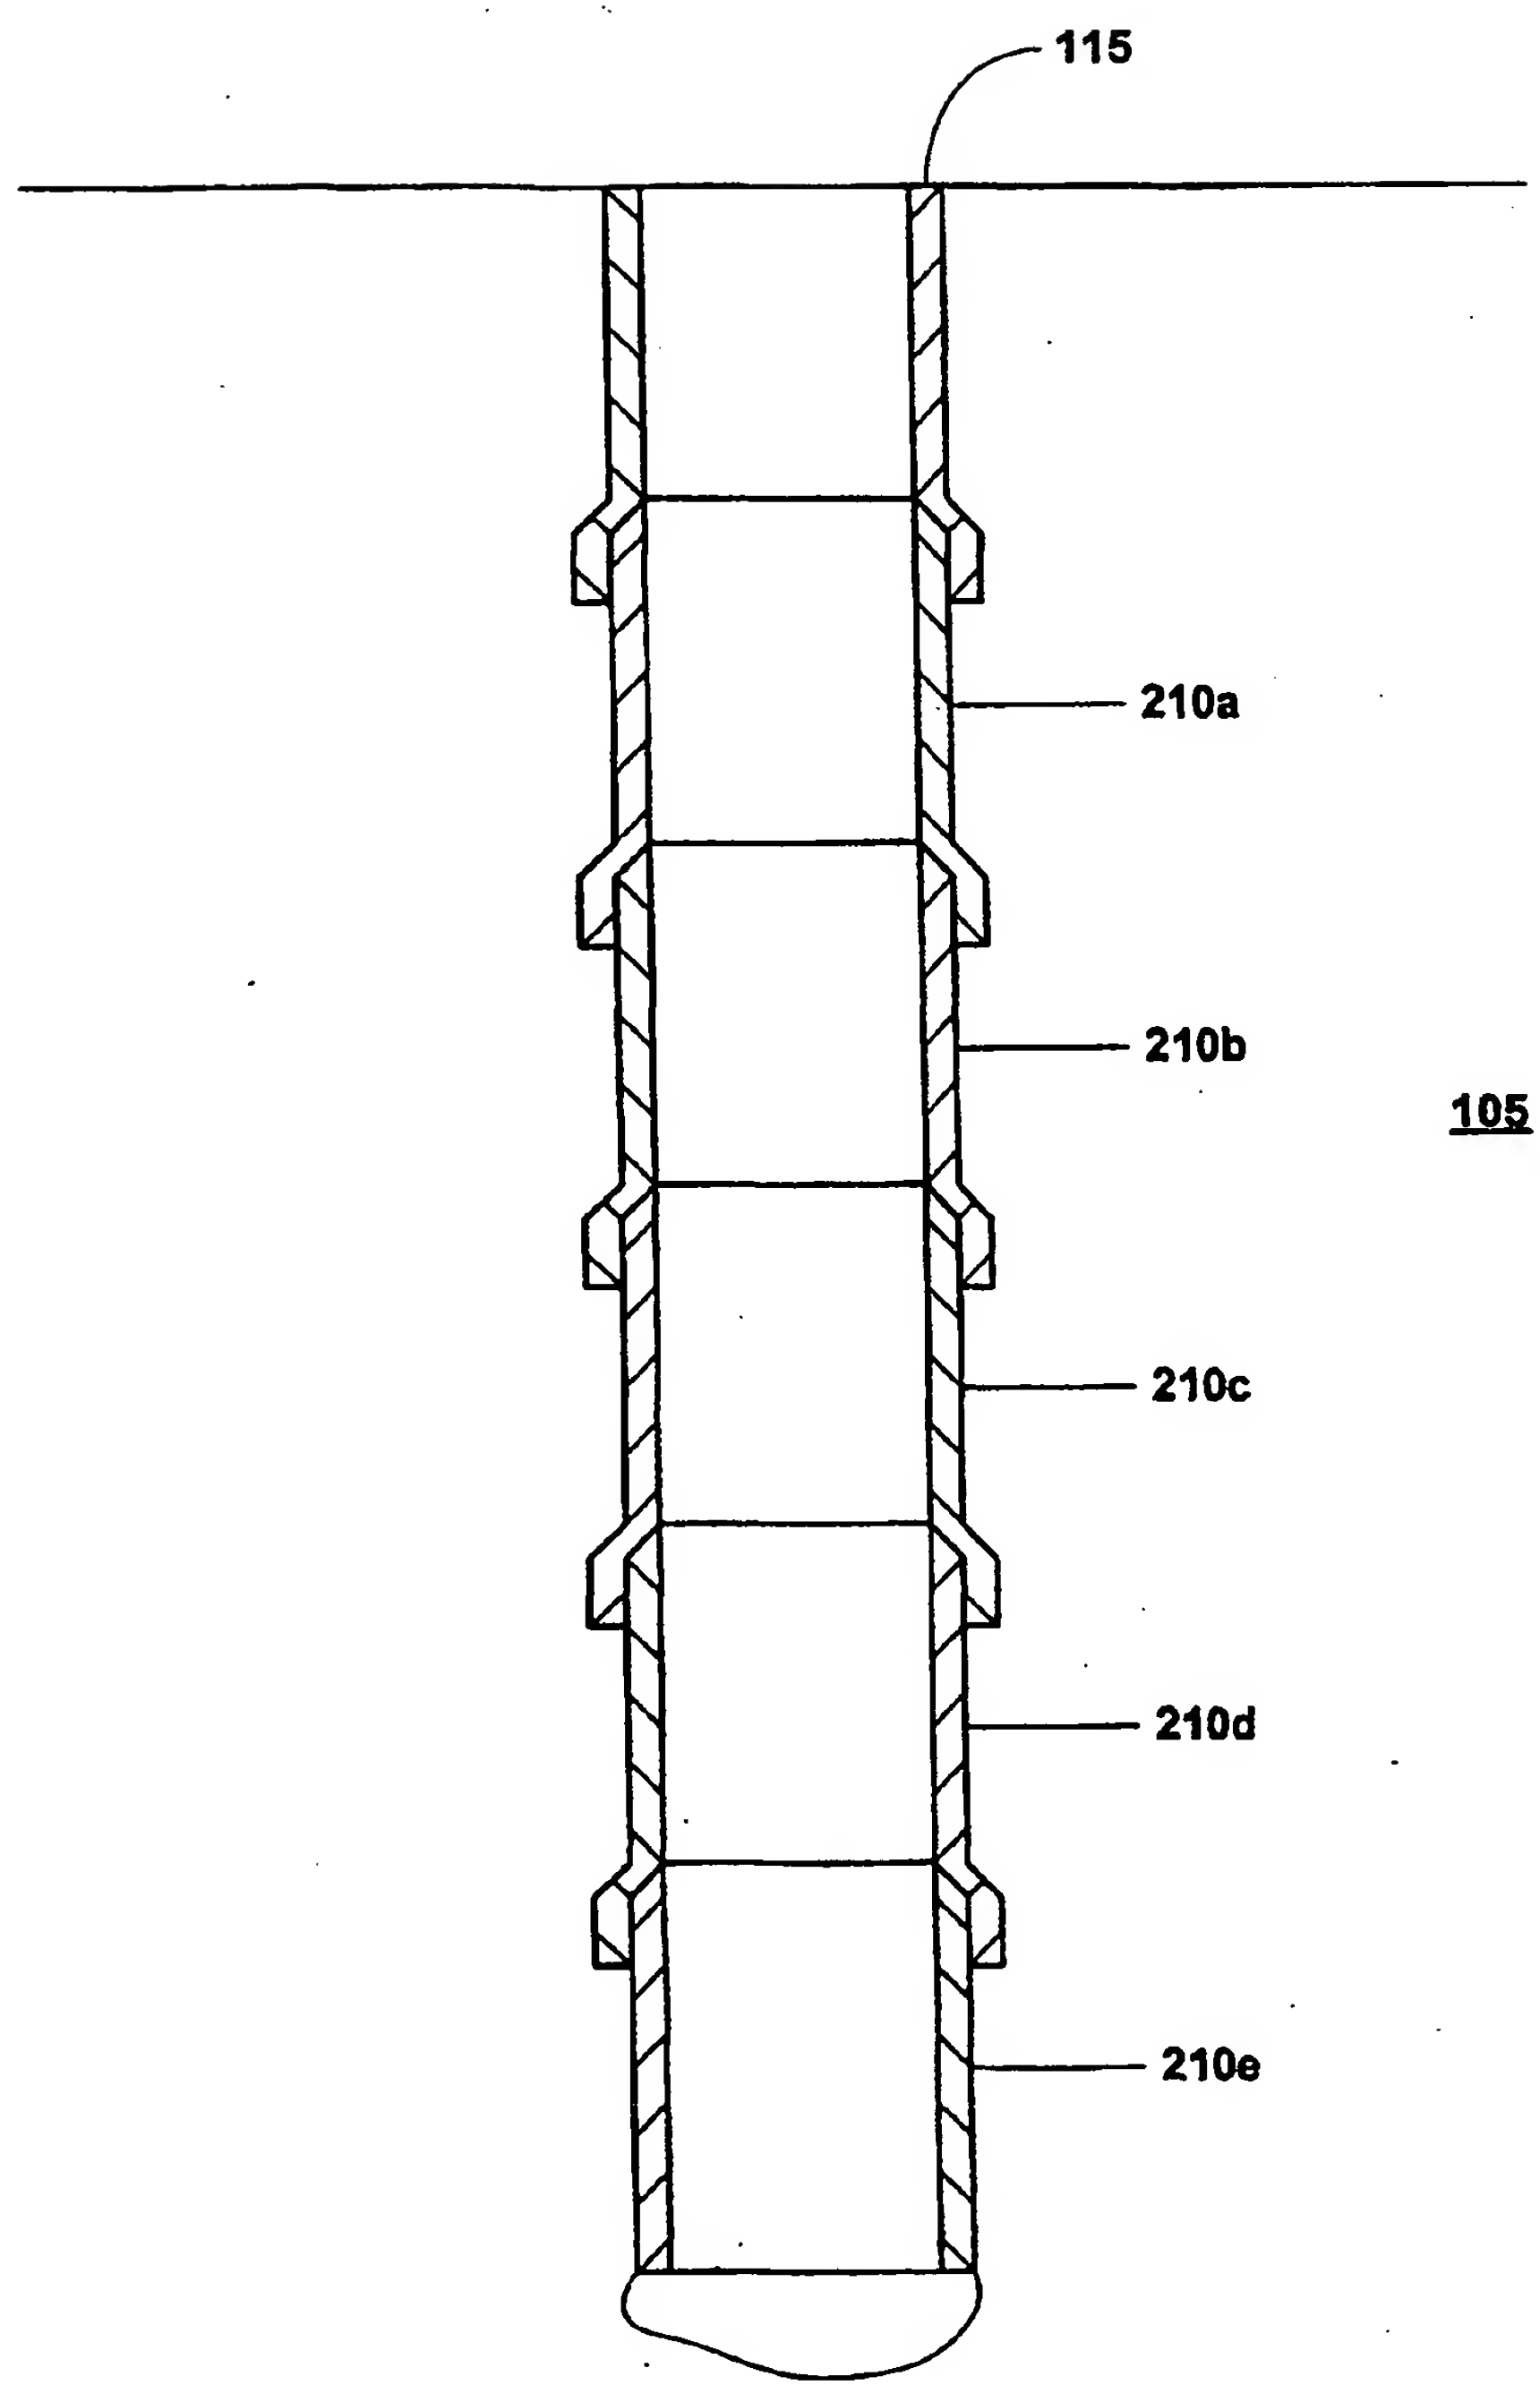
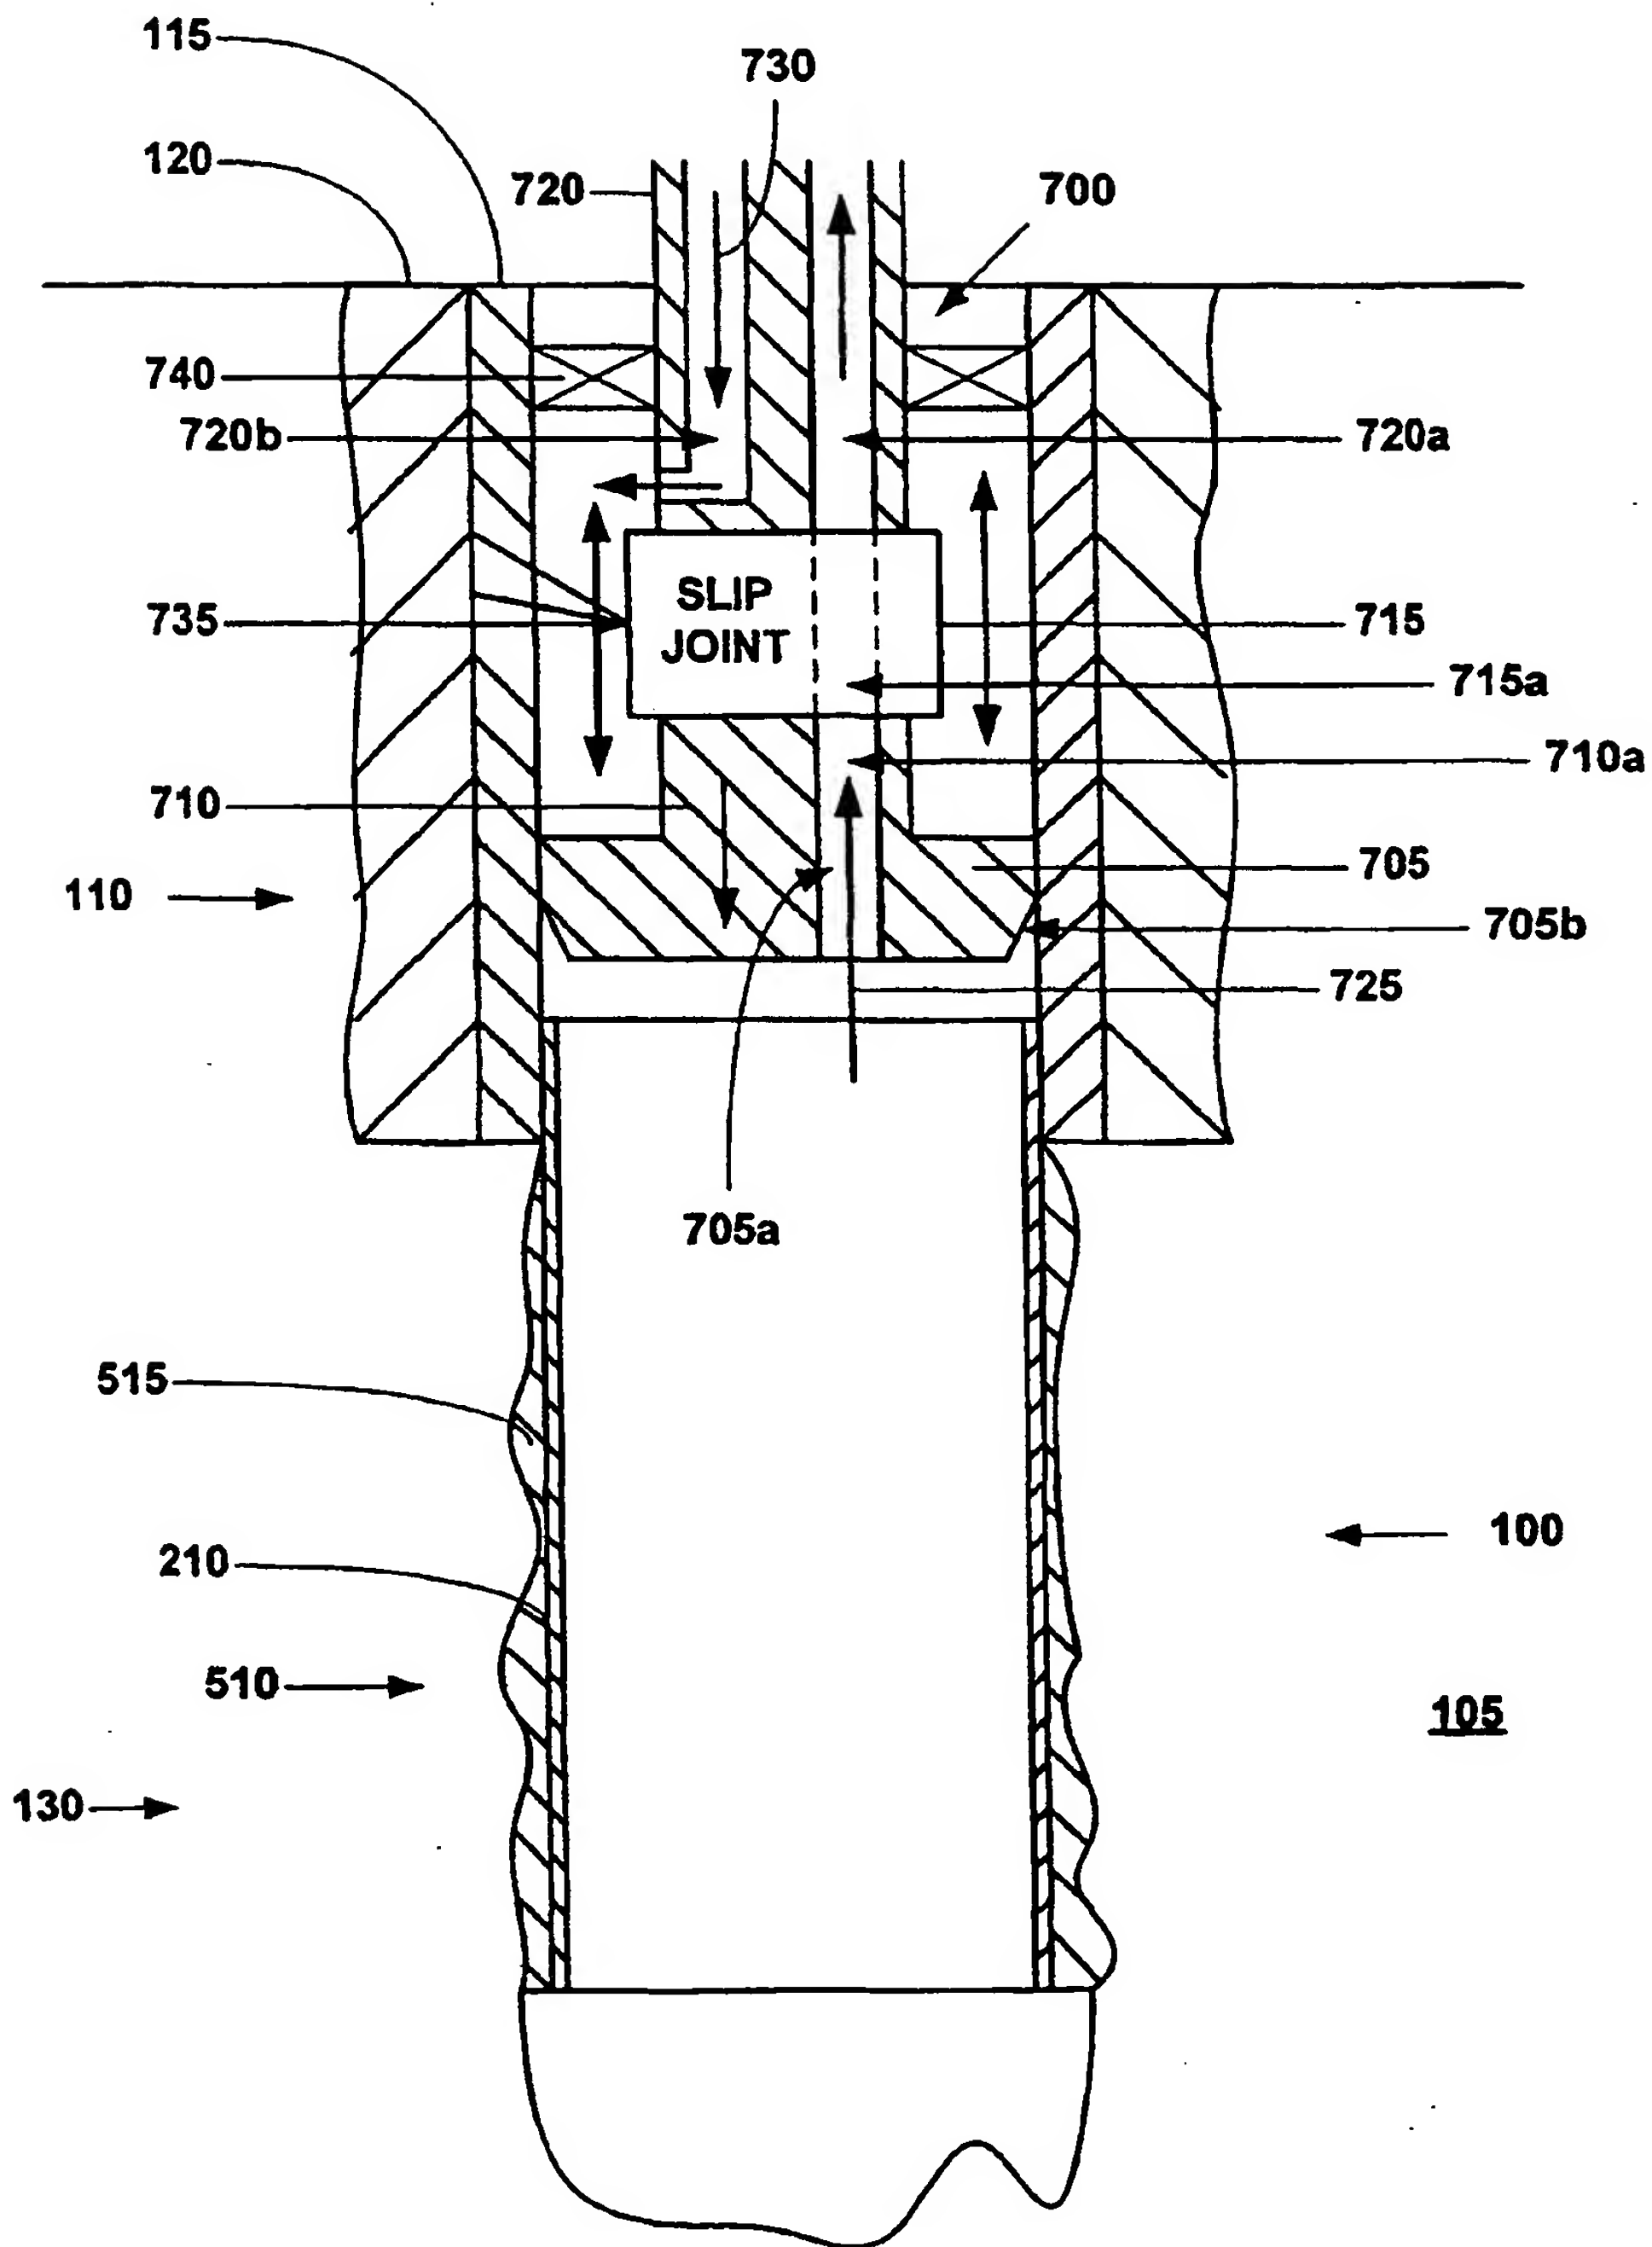


FIGURE 9

**FIGURE 10**

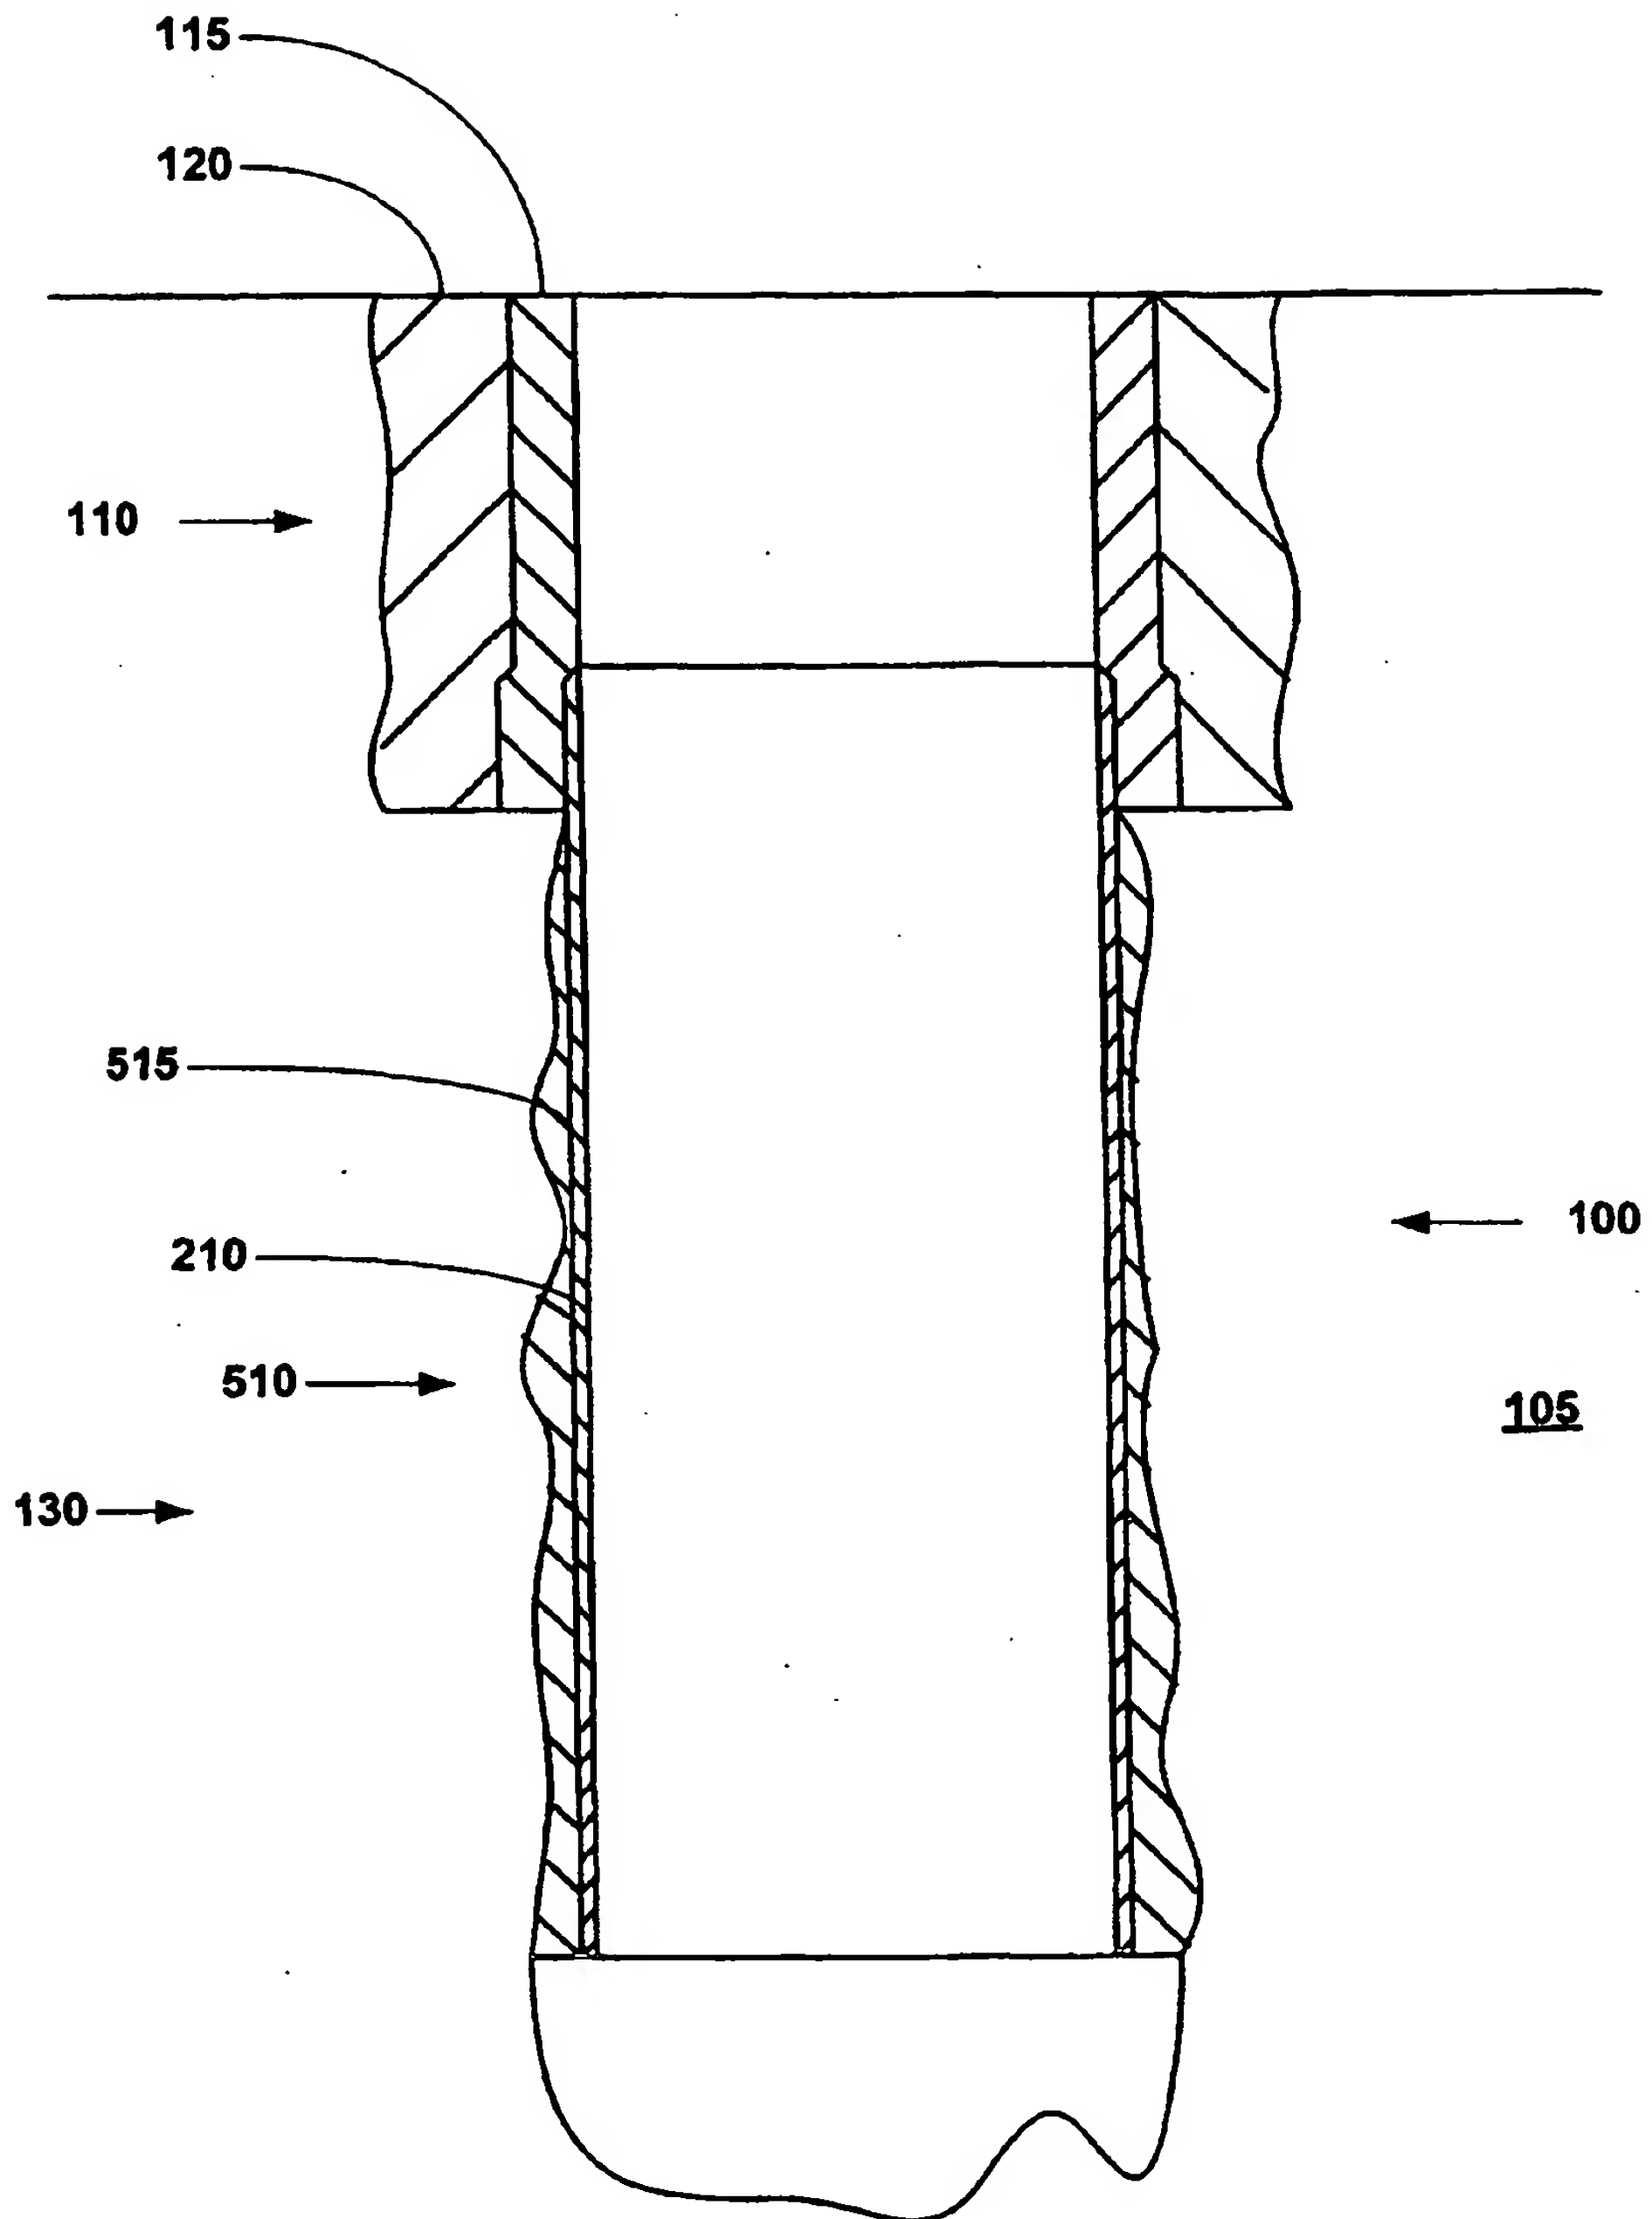


FIGURE 11

**FIGURE 12**

13/15

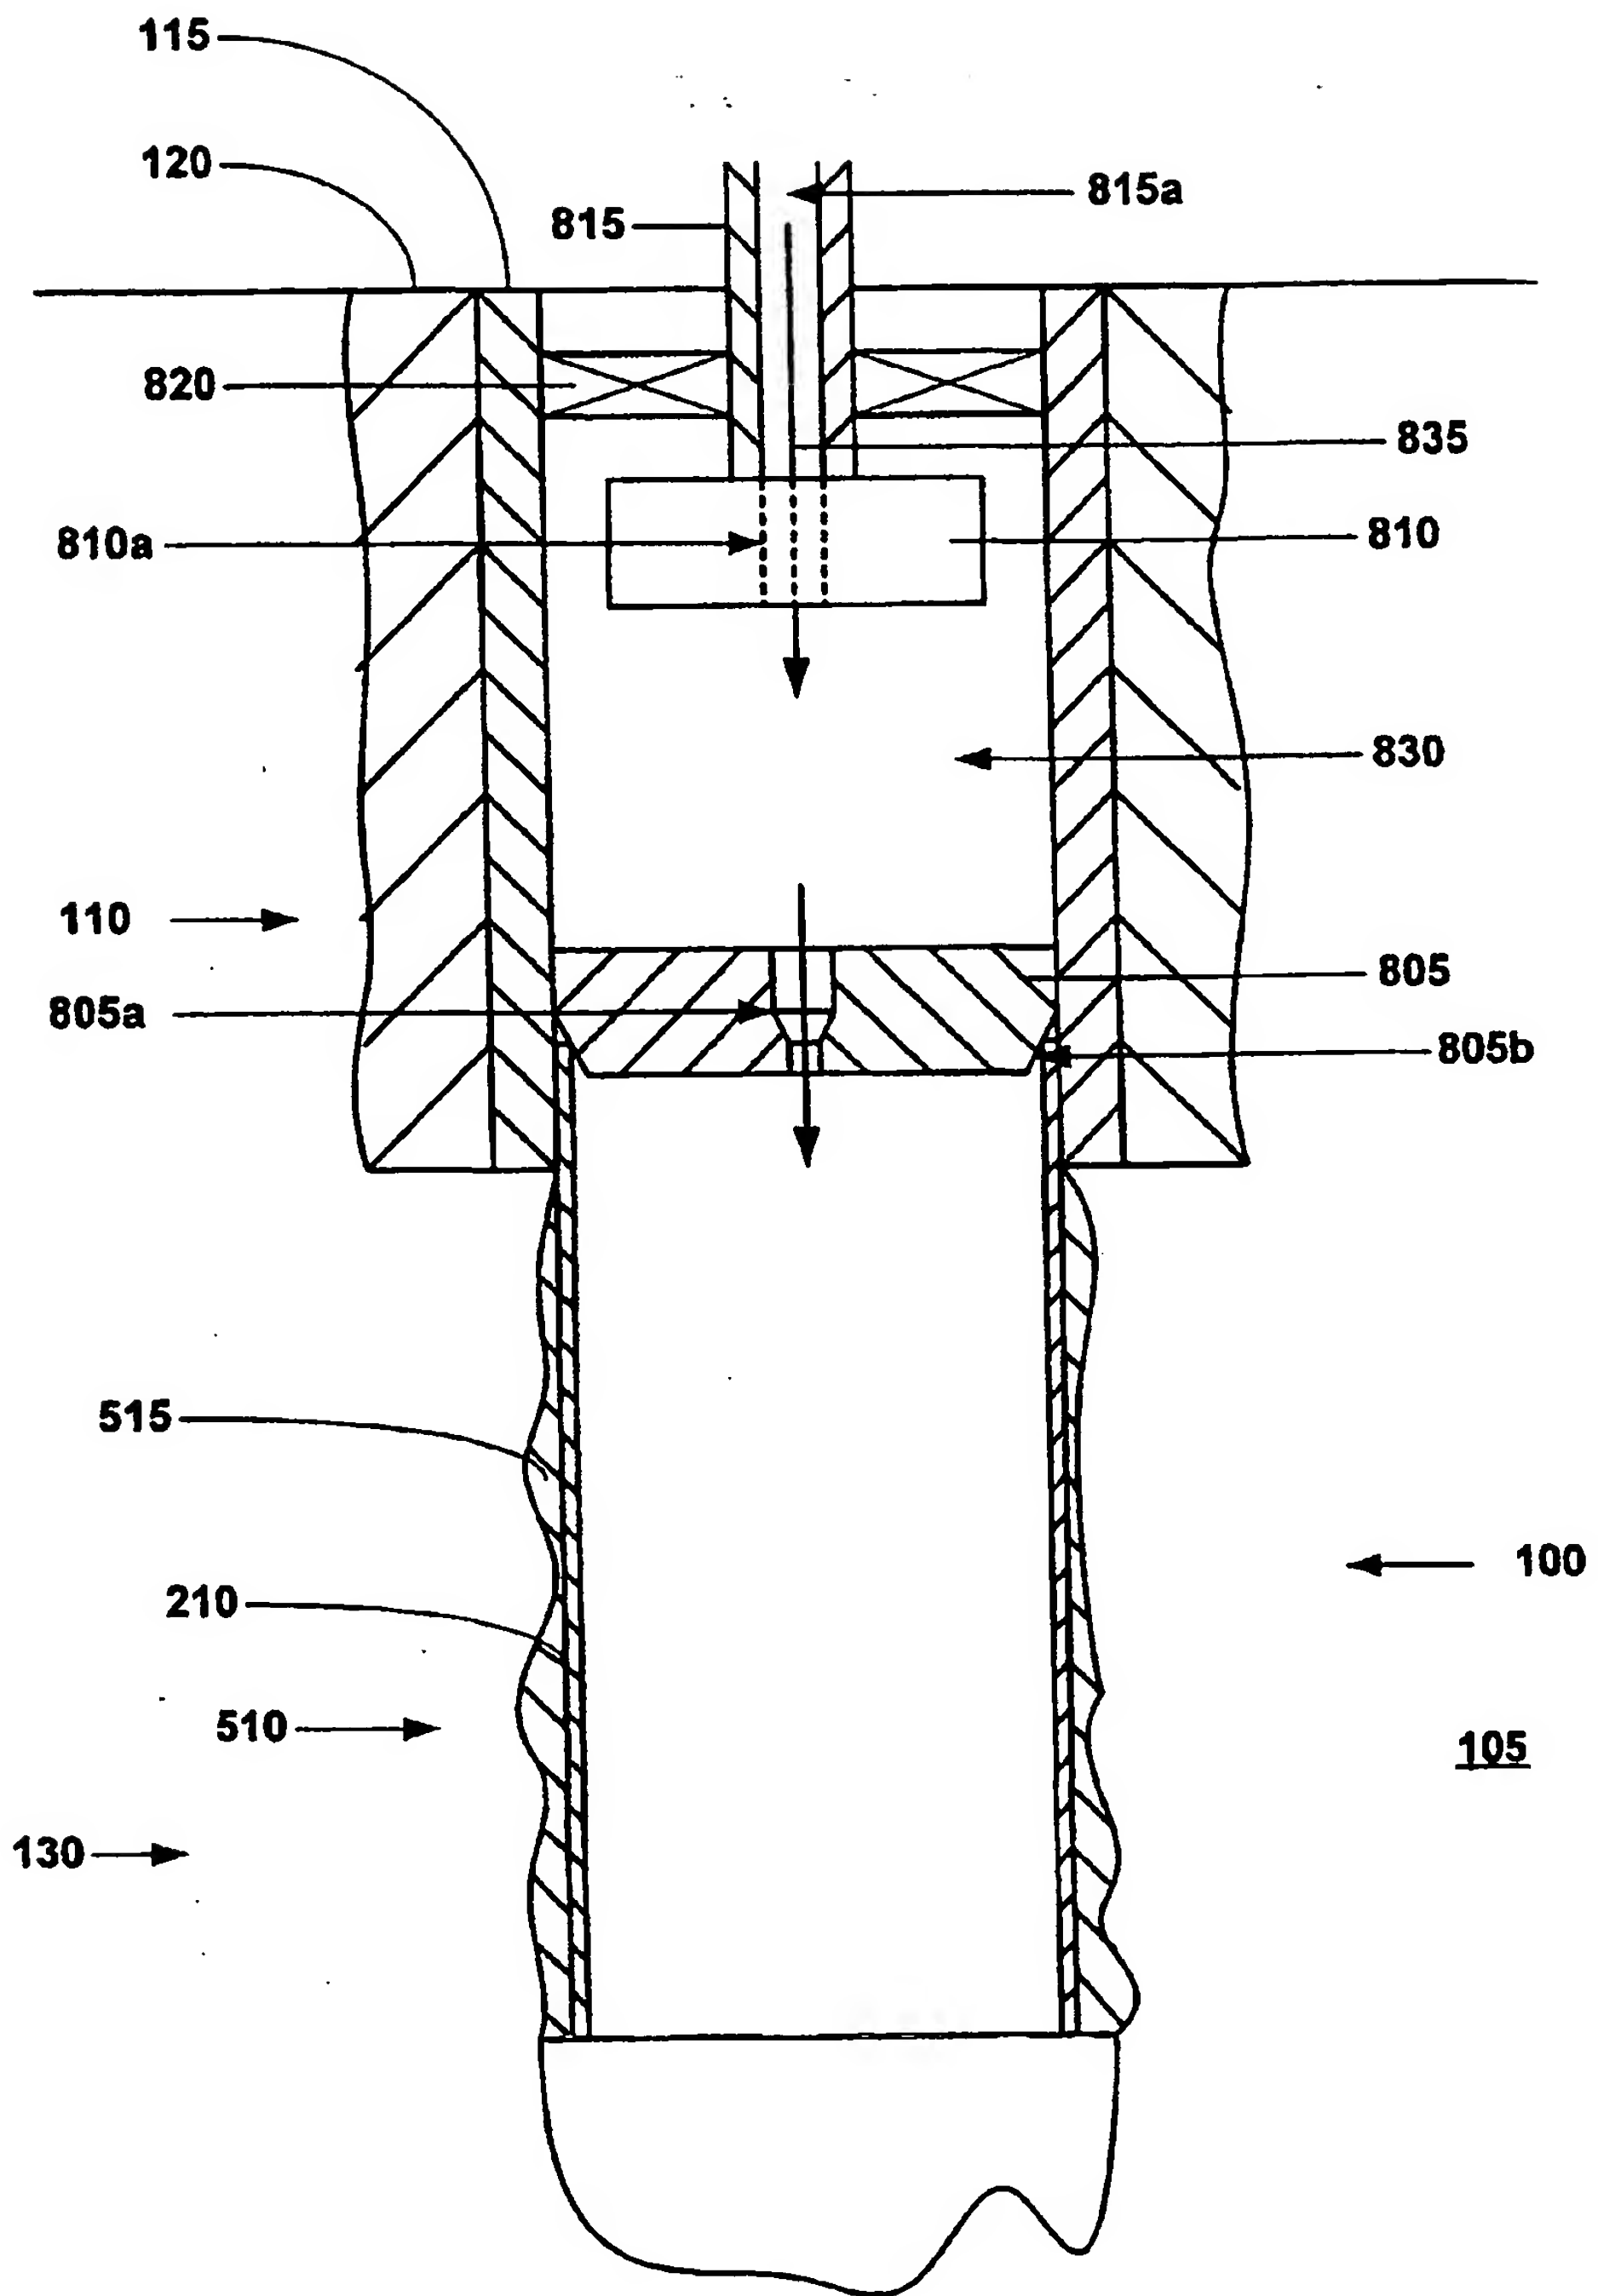


FIGURE 13

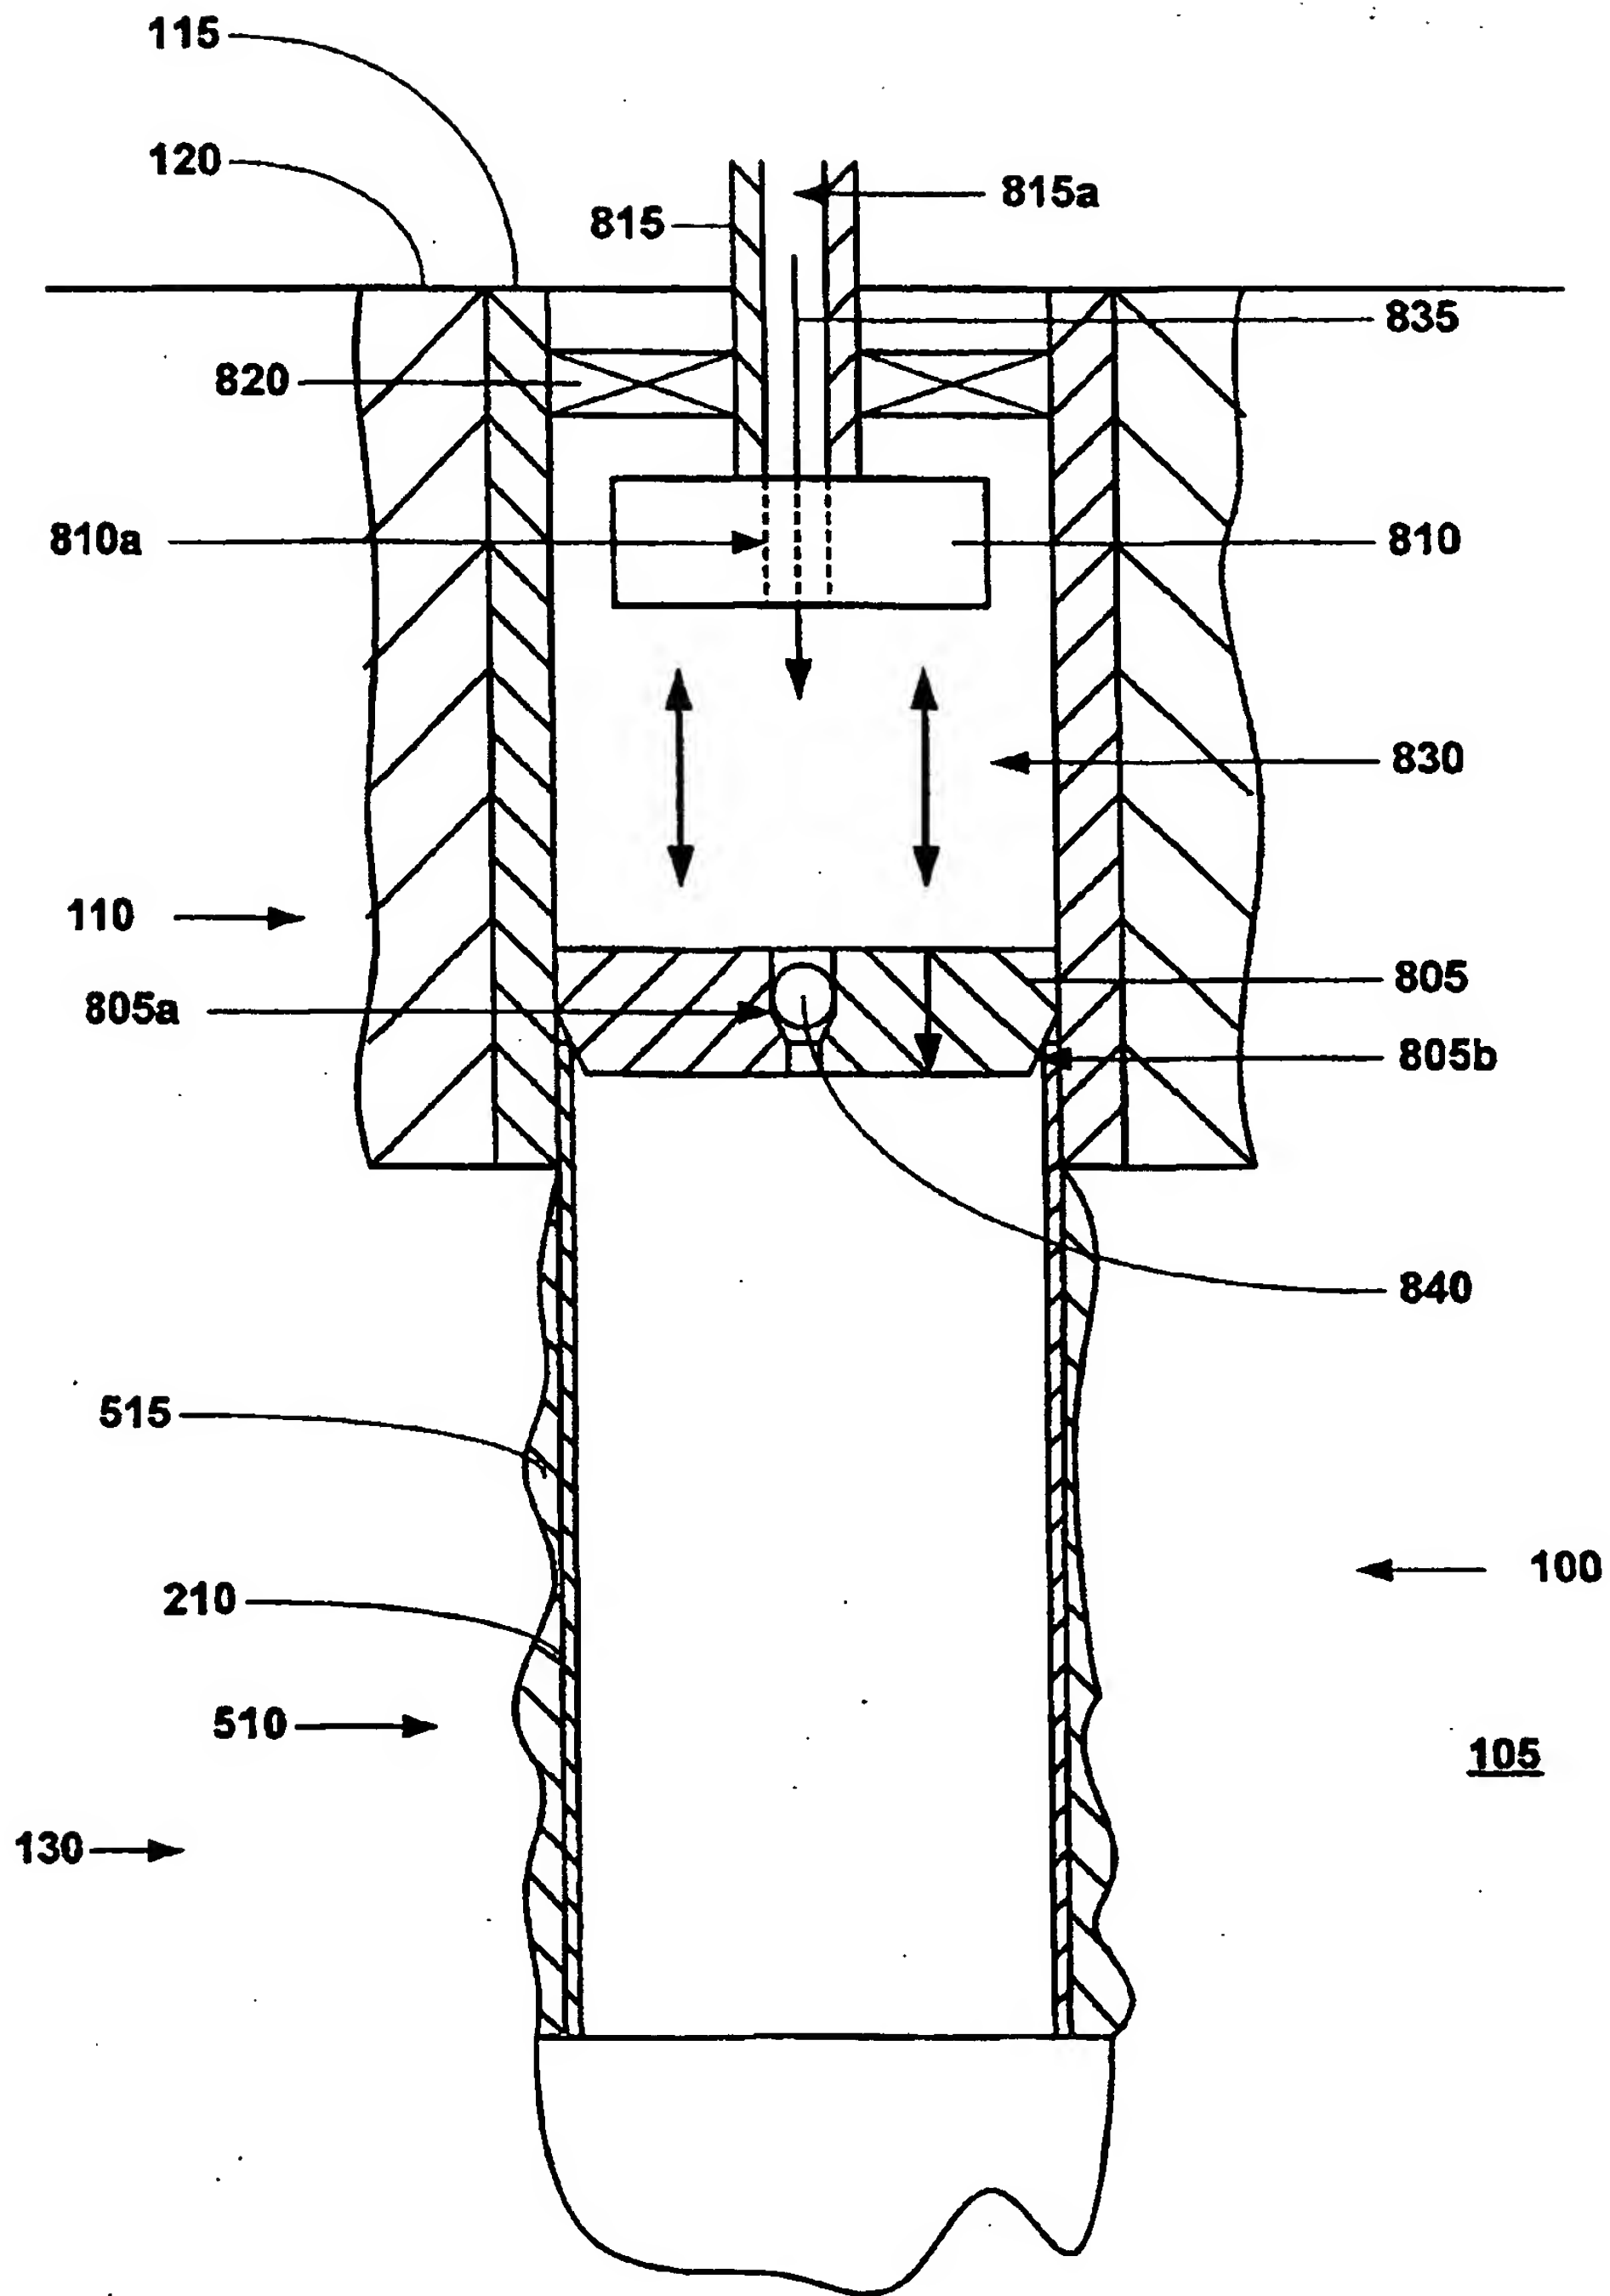


FIGURE 14

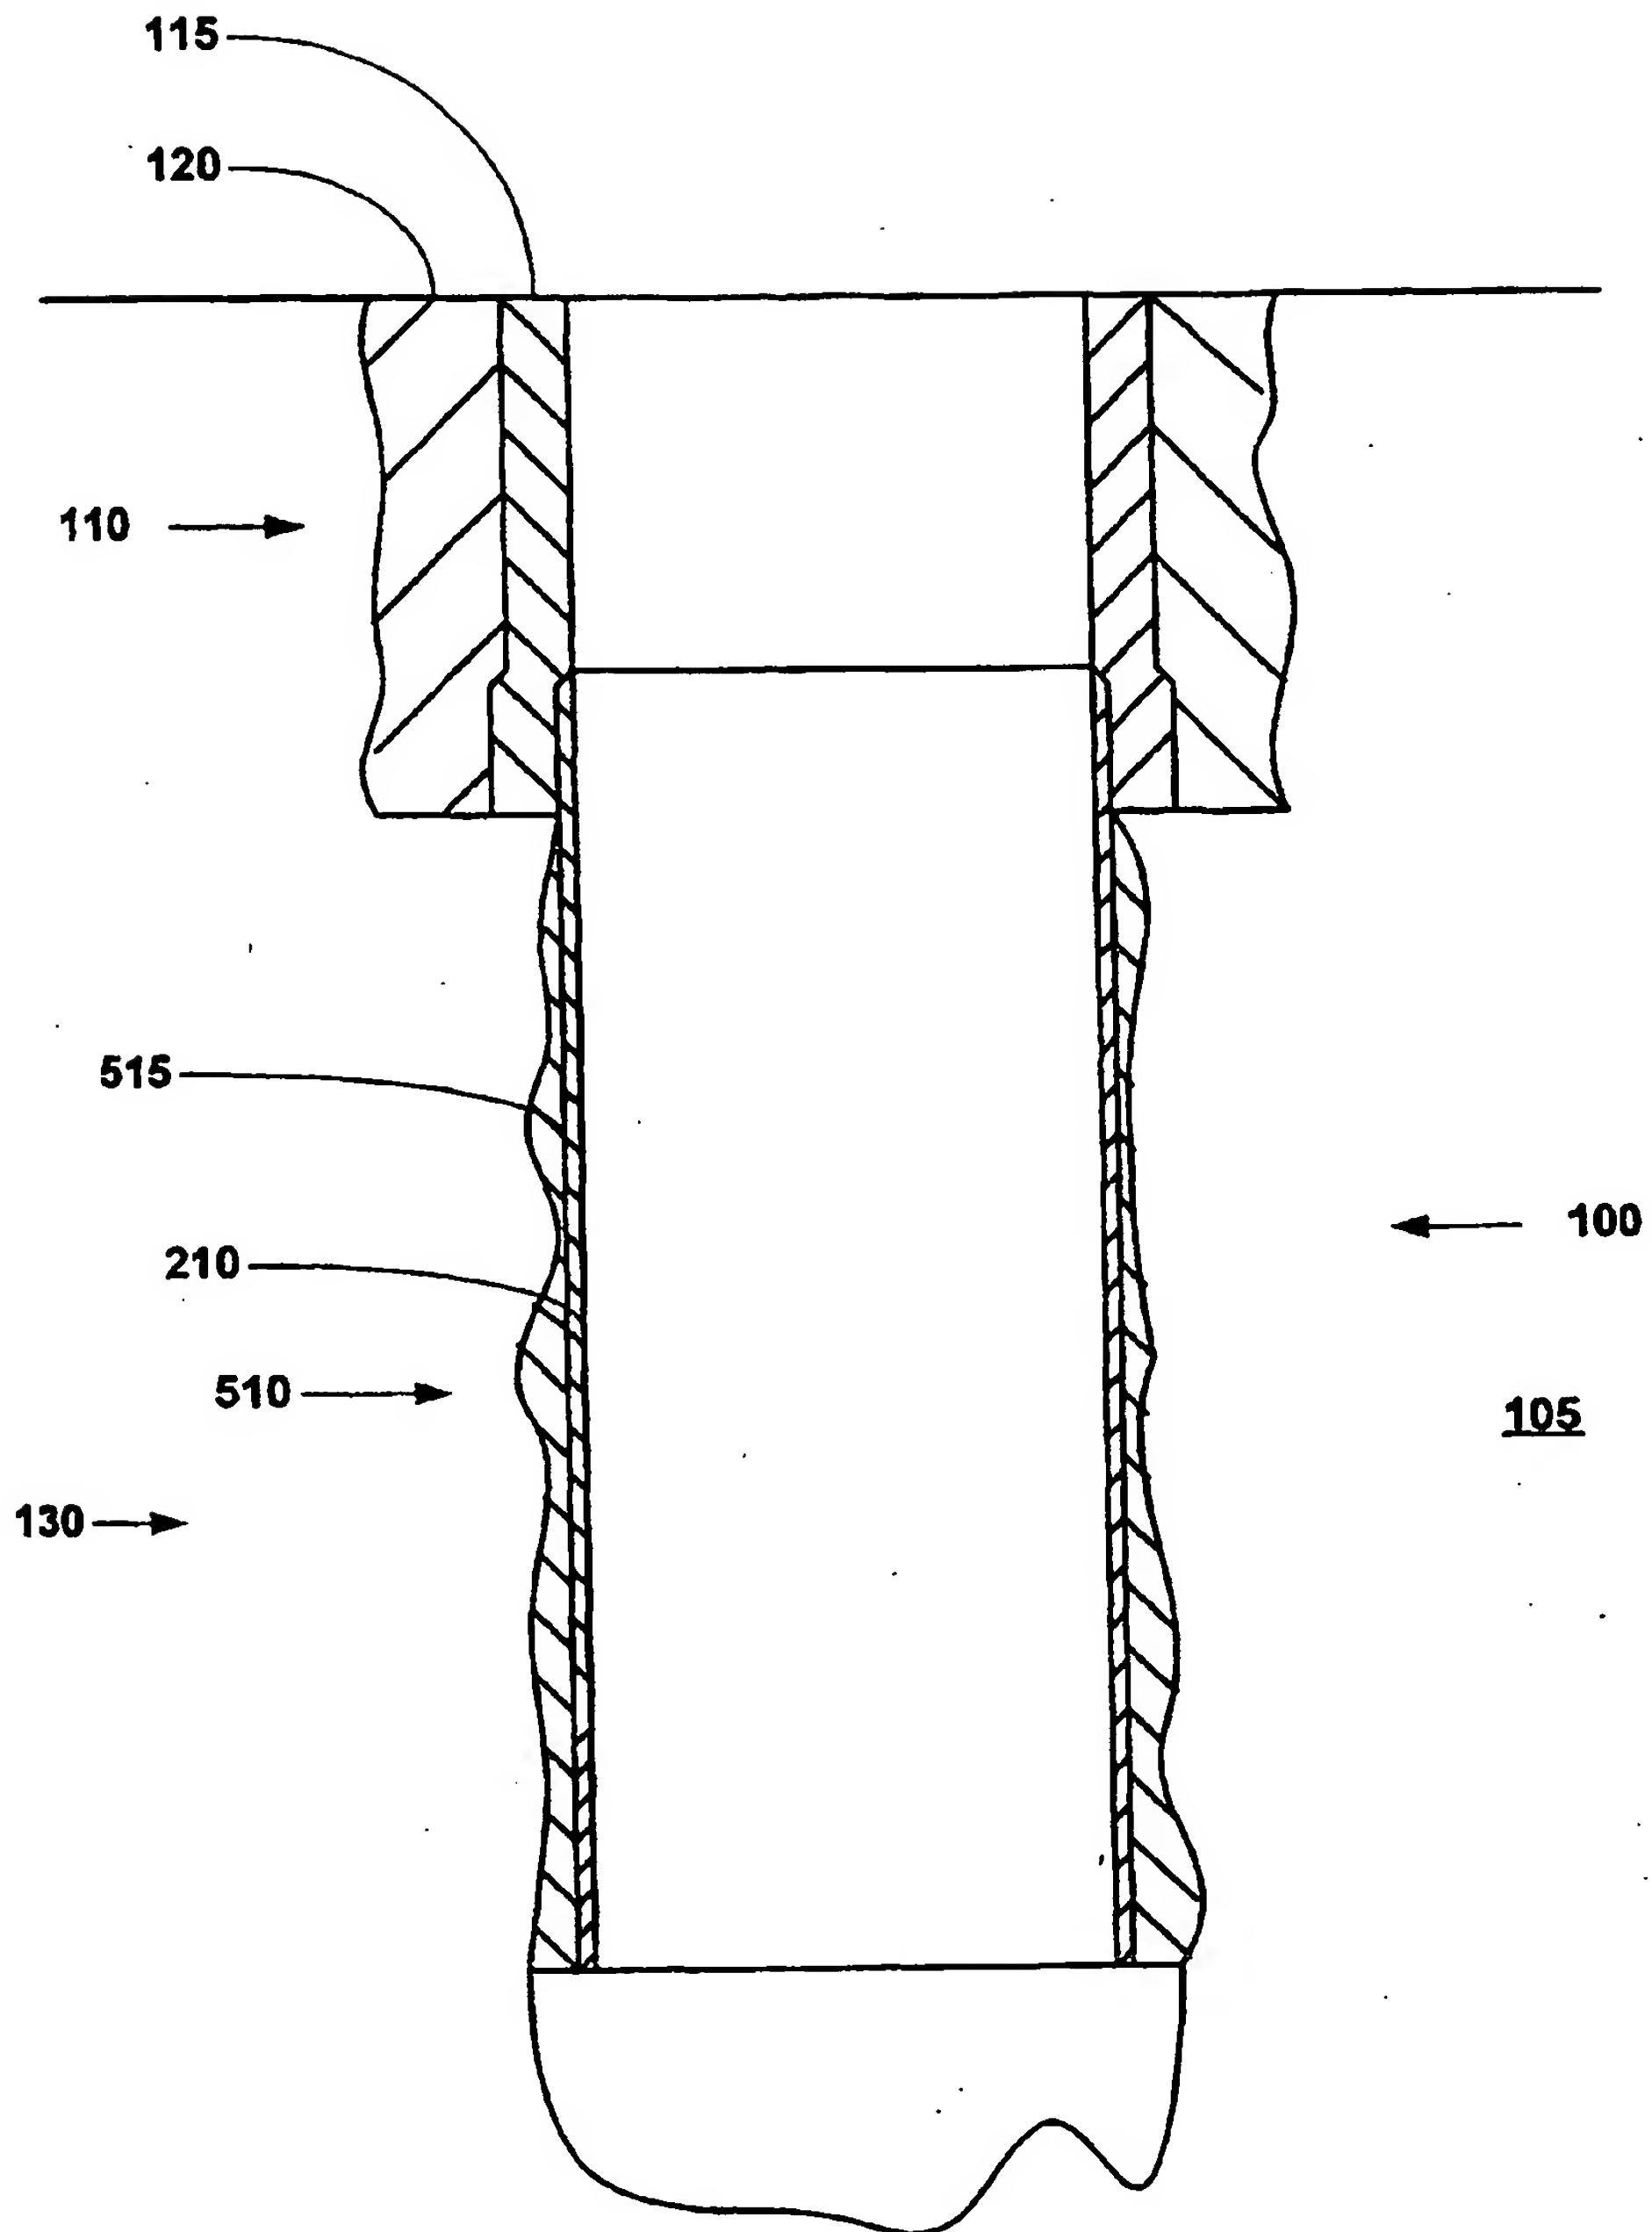


FIGURE 15

2399580
11 14 17 20 23 26 29 32 35 38 41 44 47 50 53 56 59 62 65 68 71 74 77 80 83 86 89 92 95 98 101 104 107 110 113 116 119 122 125 128 131 134 137 140 143 146 149 152 155 158 161 164 167 170 173 176 179 182 185 188 191 194 197 200 203 206 209 212 215 218 221 224 227 230 233 236 239 242 245 248 251 254 257 260 263 266 269 272 275 278 281 284 287 290 293 296 299 302 305 308 311 314 317 320 323 326 329 332 335 338 341 344 347 350 353 356 359 362 365 368 371 374 377 380 383 386 389 392 395 398 401 404 407 410 413 416 419 422 425 428 431 434 437 440 443 446 449 452 455 458 461 464 467 470 473 476 479 482 485 488 491 494 497 500 503 506 509 512 515 518 521 524 527 530 533 536 539 542 545 548 551 554 557 560 563 566 569 572 575 578 581 584 587 590 593 596 599 602 605 608 611 614 617 620 623 626 629 632 635 638 641 644 647 650 653 656 659 662 665 668 671 674 677 680 683 686 689 692 695 698 701 704 707 710 713 716 719 722 725 728 731 734 737 740 743 746 749 752 755 758 761 764 767 770 773 776 779 782 785 788 791 794 797 800 803 806 809 812 815 818 821 824 827 830 833 836 839 842 845 848 851 854 857 860 863 866 869 872 875 878 881 884 887 890 893 896 899 902 905 908 911 914 917 920 923 926 929 932 935 938 941 944 947 950 953 956 959 962 965 968 971 974 977 980 983 986 989 992 995 998 1001 1004 1007 1010 1013 1016 1019 1022 1025 1028 1031 1034 1037 1040 1043 1046 1049 1052 1055 1058 1061 1064 1067 1070 1073 1076 1079 1082 1085 1088 1091 1094 1097 1100 1103 1106 1109 1112 1115 1118 1121 1124 1127 1130 1133 1136 1139 1142 1145 1148 1151 1154 1157 1160 1163 1166 1169 1172 1175 1178 1181 1184 1187 1190 1193 1196 1199 1202 1205 1208 1211 1214 1217 1220 1223 1226 1229 1232 1235 1238 1241 1244 1247 1250 1253 1256 1259 1262 1265 1268 1271 1274 1277 1280 1283 1286 1289 1292 1295 1298 1301 1304 1307 1310 1313 1316 1319 1322 1325 1328 1331 1334 1337 1340 1343 1346 1349 1352 1355 1358 1361 1364 1367 1370 1373 1376 1379 1382 1385 1388 1391 1394 1397 1400 1403 1406 1409 1412 1415 1418 1421 1424 1427 1430 1433 1436 1439 1442 1445 1448 1451 1454 1457 1460 1463 1466 1469 1472 1475 1478 1481 1484 1487 1490 1493 1496 1499 1502 1505 1508 1511 1514 1517 1520 1523 1526 1529 1532 1535 1538 1541 1544 1547 1550 1553 1556 1559 1562 1565 1568 1571 1574 1577 1580 1583 1586 1589 1592 1595 1598 1601 1604 1607 1610 1613 1616 1619 1622 1625 1628 1631 1634 1637 1640 1643 1646 1649 1652 1655 1658 1661 1664 1667 1670 1673 1676 1679 1682 1685 1688 1691 1694 1697 1700 1703 1706 1709 1712 1715 1718 1721 1724 1727 1730 1733 1736 1739 1742 1745 1748 1751 1754 1757 1760 1763 1766 1769 1772 1775 1778 1781 1784 1787 1790 1793 1796 1799 1802 1805 1808 1811 1814 1817 1820 1823 1826 1829 1832 1835 1838 1841 1844 1847 1850 1853 1856 1859 1862 1865 1868 1871 1874 1877 1880 1883 1886 1889 1892 1895 1898 1901 1904 1907 1910 1913 1916 1919 1922 1925 1928 1931 1934 1937 1940 1943 1946 1949 1952 1955 1958 1961 1964 1967 1970 1973 1976 1979 1982 1985 1988 1991 1994 1997 2000 2003 2006 2009 2012 2015 2018 2021 2024 2027 2030 2033 2036 2039 2042 2045 2048 2051 2054 2057 2060 2063 2066 2069 2072 2075 2078 2081 2084 2087 2090 2093 2096 2099 2102 2105 2108 2111 2114 2117 2120 2123 2126 2129 2132 2135 2138 2141 2144 2147 2150 2153 2156 2159 2162 2165 2168 2171 2174 2177 2180 2183 2186 2189 2192 2195 2198 2201 2204 2207 2210 2213 2216 2219 2222 2225 2228 2231 2234 2237 2240 2243 2246 2249 2252 2255 2258 2261 2264 2267 2270 2273 2276 2279 2282 2285 2288 2291 2294 2297 2300 2303 2306 2309 2312 2315 2318 2321 2324 2327 2330 2333 2336 2339 2342 2345 2348 2351 2354 2357 2360 2363 2366 2369 2372 2375 2378 2381 2384 2387 2390 2393 2396 2399 2402 2405 2408 2411 2414 2417 2420 2423 2426 2429 2432 2435 2438 2441 2444 2447 2450 2453 2456 2459 2462 2465 2468 2471 2474 2477 2480 2483 2486 2489 2492 2495 2498 2501 2504 2507 2510 2513 2516 2519 2522 2525 2528 2531 2534 2537 2540 2543 2546 2549 2552 2555 2558 2561 2564 2567 2570 2573 2576 2579 2582 2585 2588 2591 2594 2597 2600 2603 2606 2609 2612 2615 2618 2621 2624 2627 2630 2633 2636 2639 2642 2645 2648 2651 2654 2657 2660 2663 2666 2669 2672 2675 2678 2681 2684 2687 2690 2693 2696 2699 2702 2705 2708 2711 2714 2717 2720 2723 2726 2729 2732 2735 2738 2741 2744 2747 2750 2753 2756 2759 2762 2765 2768 2771 2774 2777 2780 2783 2786 2789 2792 2795 2798 2801 2804 2807 2810 2813 2816 2819 2822 2825 2828 2831 2834 2837 2840 2843 2846 2849 2852 2855 2858 2861 2864 2867 2870 2873 2876 2879 2882 2885 2888 2891 2894 2897 2900 2903 2906 2909 2912 2915 2918 2921 2924 2927 2930 2933 2936 2939 2942 2945 2948 2951 2954 2957 2960 2963 2966 2969 2972 2975 2978 2981 2984 2987 2990 2993 2996 2999 3002 3005 3008 3011 3014 3017 3020 3023 3026 3029 3032 3035 3038 3041 3044 3047 3050 3053 3056 3059 3062 3065 3068 3071 3074 3077 3080 3083 3086 3089 3092 3095 3098 3101 3104 3107 3110 3113 3116 3119 3122 3125 3128 3131 3134 3137 3140 3143 3146 3149 3152 3155 3158 3161 3164 3167 3170 3173 3176 3179 3182 3185 3188 3191 3194 3197 3200 3203 3206 3209 3212 3215 3218 3221 3224 3227 3230 3233 3236 3239 3242 3245 3248 3251 3254 3257 3260 3263 3266 3269 3272 3275 3278 3281 3284 3287 3290 3293 3296 3299 3302 3305 3308 3311 3314 3317 3320 3323 3326 3329 3332 3335 3338 3341 3344 3347 3350 3353 3356 3359 3362 3365 3368 3371 3374 3377 3380 3383 3386 3389 3392 3395 3398 3401 3404 3407 3410 3413 3416 3419 3422 3425 3428 3431 3434 3437 3440 3443 3446 3449 3452 3455 3458 3461 3464 3467 3470 3473 3476 3479 3482 3485 3488 3491 3494 3497 3500 3503 3506 3509 3512 3515 3518 3521 3524 3527 3530 3533 3536 3539 3542 3545 3548 3551 3554 3557 3560 3563 3566 3569 3572 3575 3578 3581 3584 3587 3590 3593 3596 3599 3602 3605 3608 3611 3614 3617 3620 3623 3626 3629 3632 3635 3638 3641 3644 3647 3650 3653 3656 3659 3662 3665 3668 3671 3674 3677 3680 3683 3686 3689 3692 3695 3698 3701 3704 3707 3710 3713 3716 3719 3722 3725 3728 3731 3734 3737 3740 3743 3746 3749 3752 3755 3758 3761 3764 3767 3770 3773 3776 3779 3782 3785 3788 3791 3794 3797 3800 3803 3806 3809 3812 3815 3818 3821 3824 3827 3830 3833 3836 3839 3842 3845 3848 3851 3854 3857 3860 3863 3866 3869 3872 3875 3878 3881 3884 3887 3890 3893 3896 3899 3902 3905 3908 3911 3914 3917 3920 3923 3926 3929 3932 3935 3938 3941 3944 3947 3950 3953 3956 3959 3962 3965 3968 3971 3974 3977 3980 3983 3986 3989 3992 3995 3998 4001 4004 4007 4010 4013 4016 4019 4022 4025 4028 4031 4034 4037 4040 4043 4046 4049 4052 4055 4058 4061 4064 4067 4070 4073 4076 4079 4082 4085 4088 4091 4094 4097 4100 4103 4106 4109 4112 4115 4118 4121 4124 4127 4130 4133 4136 4139 4142 4145 4148 4151 4154 4157 4160 4163 4166 4169 4172 4175 4178 4181 4184 4187 4190 4193 4196 4199 4202 4205 4208 4211 4214 4217 4220 4223 4226 4229 4232 4235 4238 4241 4244 4247 4250 4253 4256 4259 4262 4265 4268 4271 4274 4277 4280 4283 4286 4289 4292 4295 4298 4301 4304 4307 4310 4313 4316 4319 4322 4325 4328 4331 4334 4337 4340 4343 4346 4349 4352 4355 4358 4361 4364 4367 4370 4373 4376 4379 4382 4385 4388 4391 4394 4397 4400 4403 4406 4409 4412 4415 4418 4421 4424 4427 4430 4433 4436 4439 4442 4445 4448 4451 4454 4457 4460 4463 4466 4469 4472 4475 4478 4481 4484 4487 4490 4493 4496 4499 4502 4505 4508 4511 4514 4517 4520 4523 4526 4529 4532 4535 4538 4541 4544 4547 4550 4553 4556 4559 4562 4565 4568 4571 4574 4577 4580 4583 4586 4589 4592 4595 4598 4601 4604 4607 4610 4613 4616 4619 4622 4625 4628 4631 4634 4637 4640 4643 4646 4649 4652 4655 4658 4661 4664 4667 4670 4673 4676 4679 4682 4685 4688 4691 4694 4697 4700 4703 4706 4709 4712 4715 4718 4721 4724 4727 4730 4733 4736 4739 4742 4745 4748 4751 4754 4757 4760 4763 4766 4769 4772 4775 4778 4781 4784 4787 4790 4793 4796 4799 4802 4805 4808 4811 4814 4817 4820 4823 4826 4829 4832 4835 4838 4841 4844 4847 4850 4853 4856 4859 4862 4865 4868 4871 4874 4877 4880 4883 4886 4889 4892 4895 4898 4901 4904 4907 4910 4913 4916 4919 4922 4925 4928 4931 4934 4937 4940 4943 4946 4949 4952 4955 4958 4961 4964 4967 4970 4973 4976 4979 4982 4985 4988 4991 4994 4997 5000 5003 5006 5009 5012 5015 5018 5021 5024 5027 5030 5033 5036 5039 5042 5045 5048 5051 5054 5057 5060 5063 5066 5069 5072 5075 5078 5081 5084 5087 5090 5093 5096 5099 5102 5105 5108 5111 5114 5117 5120 5123 5126 5129 5132 5135 5138 5141 5144 5147 5150 5153 5156 5159 5162 5165 5168 5171 5174 5177 5180 5183 5186 5189 5192 5195 5198 5201 5204 5207 5210 5213 5216 5219 5222 5225 5228 5231 5234 5237 5240 5243 5246 5249 5252 5255 5258 5261 5264 5267 5270 5273 5276 5279 5282 5285 5288 5291 5294 5297 5300 5303 5306 5309 5312 5315 5318 5321 5324 5327 5330 5333 5336 5339 5342 5345 5348 5351 5354 5357 5360 5363 5366 5369 5372 5375 5378 5381 5384 5387 5390 5393 5396 5399 5402 5405 5408 5411 5414 5417 5420 5423 5426 5429 5432 5435 5438 5441 5444 5447 5450 5453 5456 5459 5462 5465 5468 5471 5474 5477 5480 5483 5486 5489 5492 5495 5498 5501 5504 5507 5510 5513 5516 5519 5522 5525 5528 5531 5534 5537 5540 5543 5546 5549 5552 5555 5558 5561 5564 5567 5570 5573 5576 5579 5582 5585 5588 5591 5594 5597 5600 5603 5606 5609 5612 5615 5618 5621 5624 5627 5630 5633 5636 5639 5642 5645 5648 5651 5654 5657 5660 5663 5666 5669 5672 5675 5678 5681 5684 5687 5690 5693 5696 5699 5702 5705 5708 5711 5714 5717 5720 5723 5726 5729 5732 5735 5738 5741 5744 5747 5750 5753 5756 5759 5762 5765 5768 5771 5774 5777 5780 5783 5786 5789 5792 5795 5798 5801 5804 5807 5810 5813 5816 5819 5822 5825 5828 5831 5834 5837 5840 5843 5846 5849 5852 5855 5858 5861 5864 5867 5870 5873 5876 5879 5882 5885 5888 5891 5894 5897 5900 5903 5906 5909 5912 5915 5918 5921 5924 5927 5930 5933 5936 5939 5942 5945 5948 5951 5954 5957 5960 5963 5966 5969 5972 5975 5978 5981 5984 5987 5990 5993 5996 5999 6002 6005 6008 6011 6014 6017 6020 6023 6026 6029 6032 6035 6038 6041 6044 6047 6050 6053 6056 6059 6062 6065 6068 6071 6074 6077 6080 6083 6086 6089 6092 6095 6098 6101 6104 6107 6110 6113 6116 6119 6122 6125 6128 6131 6134 6137 6140 6143 6146 6149 6152 6155 6158 6161 6164 6167 6170 6173 6176 6179 6182 6185 6188 6191 6194 6197 6200 6203 6206 6209 6212 6215 6218 6221 6224 6227 6230 6233 6236 6239 6242 6245 6248 6251 6254 6257 6260 6263 6266 6269 6272 6275 6278 6281 6284 6287 6290 6293 6296 6299 6302 6305 6308 6311 6314 6317 6320 6323 6326 6329 6332 6335 6338 6341 6344 6347 6350 6353 6356 6359 6362 6365 6368 6371 6374 6377 6380 6383 6386 6389 6392 6395 6398 6401 6404 6407 6410 6413 6416 6419 6422 6425 6428 6431 6434 6437 6440 6443 6446 6449 6452 6455 6458 6461 6464 6467 6470 6473 6476 6479 6482 6485 6488 6491 6494 6497 6500 6503 6506 6509 6512 6515 6518 6521 6524 6527 6530 6533 6536 6539 6542 6545 6548 6551 6554 6557 6560 6563 6566 6569 6572 6575 6578 6581 6584 6587 6590 6593 6596 6599 6602 6605 6608 6611 6614 6617 6620 6623 6626 6629 6632 6635 6638 6641 6644 6647 6650 6653 6656 6659 6662 6665 6668 6671 6674 6677 6680 6683 6686 6689 6692 6695 6698 6701 6704 6707 6710 6713 6716 6719 6722 6725 6728 6731 6734 6737 6740 6743 6746 6749 6752 6755 6758 6761 6764 6767 6770 6773 6776 6779 6782 6785 6788 6791 6794 6797 6800 6803 6806 6809 6812 6815 6818 6821 6824 6827 6830 6833 6836 6839 6842 6845 6848 6851 6854 6857 6860 6863 6866 6869 6872 6875 6878 6881 6884 6887 6890 6893 6896 6899 6902 6905 6908 6911 6914 6917 6920 6923 6926 6929 6932 6935 6938 6941 6944 6947 6950 6953 6956 6959 6962 6965 6968 6971 6974 6977 6980 6983 6986 6989 6992 6995 6998 7001 7004 7007 7010 7013 7016 7019 7022 7025 7028 7031 7034 7037 7040 7043 7046 7049 7052 7055 7058 7061 7064 7067 7070 7073 7076 7079 7082 7085 7088 7091 7094 7097 7100 7103 7106 7109 7112 7115 7118 7121 7124 7127 7130 7133 7136 7139 7142 7145 7148 7151 7154 7157 7160 7163 7166 7169 7172 7175 7178 7181 7184 7187 7190 7193 7196 7199 7202 7205 7208 7211 7214 7217 7220 7223 7226 7229 7232 7235 7238 7241 7244 7247 7250 7253 7256 7259 7262 7265 7268 7271 7274 7277 7280 7283 7286 7289 7292 7295 7298 7301 7304 7307 7310 7313 7316 7319 7322 7325 7328 7331 7334 7337 7340 7343 7346 7349 7352 7355 7358 7361 7364 7367 7370 7373 7376 7379 7382 7385 7388 7391 7394 7397 7400 7403 7406 7409 7412 7415 7418 7421 7424 7427 7430 7433 7436 7439 7442 7445 7448 7451 7454 7457 7460 7463 7466 7469 7472 7475 7478 7481 7484 7487 7490 7493 7496 7499 7502 7505 7508 7511 7514 7517 7520 7523 7526 7529 7532 7535 7538 7541 7544 7547 7550 7553 7556 7559 7562 7565 7568 7571 7574 7577 7580 7583 7586 7589 7592 7595 7598 7601 7604 7607 7610 7613 7616 7619 7622 7625 7628 7631 7634

releasing the expansion cone;

displacing the expansion cone by pressurizing an annular region; and

pressurizing the interior of the tubular liner.

According to another aspect of the present invention there is provided an
5 apparatus for radially expanding an overlapping joint between a wellbore casing and
a tubular liner, comprising:

means for positioning an expansion cone within the wellbore casing above the
overlapping joint;

10 means for sealing off a region within the wellbore casing above the expansion
cone;

means for releasing the expansion cone;

means for displacing the expansion cone by pressurizing an
annular region; and

means for pressurizing the interior of the tubular liner.

15 According to another aspect of the present invention there is provided a
method of radially expanding an overlapping joint between first and second tubular
members, comprising:

positioning an expansion cone within the first tubular member above the
overlapping joint;

20 sealing off a region within the first tubular member above the expansion cone;
releasing the expansion cone;

displacing the expansion cone by pressurizing an annular region; and

pressurizing the interior of the second tubular member.

According to another aspect of the present invention there is provided an
25 apparatus for radially expanding an overlapping joint between first and second
tubular members, comprising:

means for positioning an expansion cone within the first tubular member above
the overlapping joint;

30 means for sealing off a region within the first tubular member above the
expansion cone;

means for releasing the expansion cone;
means for displacing the expansion cone by pressurizing an annular region;
and
means for pressurizing the interior of the second tubular member.

- 5 The invention will now be described with reference to the accompanying drawings ,
in which Figures 12 to 14 show embodiments of the invention. The other drawings
are included for illustrative purposes only.

Brief Description of the Drawings

10 FIG. 1 is a fragmentary cross-sectional view illustrating the drilling of a new
section of a well borehole.

FIG. 2 is a fragmentary cross-sectional view illustrating the placement of an
apparatus for creating a casing within the new section of the well borehole of FIG. 1.

FIG. 3 is a fragmentary cross-sectional view illustrating the injection of a
15 hardenable fluidic sealing material into the new section of the well borehole of FIG.
2.

FIG. 4 is a fragmentary cross-sectional view illustrating the injection of a
fluidic material into the new section of the well borehole of FIG. 3.

FIG. 5 is a fragmentary cross-sectional view illustrating the drilling out of the
20 cured hardenable fluidic sealing material and the shoe from the new section of the
well borehole of FIG. 4.

FIG. 6 is a cross-sectional view of the well borehole of FIG. 5 following the
drilling out of the shoe.

FIG. 7 is a fragmentary cross-sectional view of the placement and actuation
25 of a second expansion cone within the well borehole of FIG. 6 for forming a mono-
diameter wellbore casing.

FIG. 8 is a cross-sectional illustration of the well borehole of FIG. 7
following the formation of a mono-diameter wellbore casing.

FIG. 9 is a cross-sectional illustration of the well borehole of FIG. 8
30 following the repeated operation of the methods of FIGS. 1-8 in order to form a

mono-diameter wellbore casing including a plurality of overlapping wellbore casings.

FIG. 10 is a fragmentary cross-sectional illustration of the placement of a second expansion cone for forming a mono-diameter wellbore casing into the well borehole of FIG. 6.

FIG. 11 is a cross-sectional illustration of the well borehole of FIG. 10 following the formation of a mono-diameter wellbore casing.

FIG. 12 is a fragmentary cross-sectional illustration of the placement of an embodiment of a second expansion cone for forming a mono-diameter wellbore casing into the well borehole of FIG. 6.

FIG. 13 is a fragmentary cross-sectional illustration of the well borehole of FIG. 12 during the injection of pressurized fluids into the well borehole.

FIG. 14 is a fragmentary cross-sectional illustration of the well borehole of FIG. 13 during the formation of the mono-diameter wellbore casing.

FIG. 15 is a fragmentary cross-sectional illustration of the well borehole of FIG. 14 following the formation of the mono-diameter wellbore casing.

Detailed Description

Referring initially to FIGS. 1-9, an apparatus and method for forming a mono-diameter wellbore casing within a subterranean formation will now be described. As illustrated in Fig. 1, a wellbore 100 is positioned in a subterranean formation 105. The wellbore 100 includes a pre-existing cased section 110 having a tubular casing 115 and an annular outer layer 120 of a fluidic sealing material such as, for example, cement. The wellbore 100 may be positioned in any orientation from vertical to horizontal. In alternative arrangements, the pre-existing cased section 110 does not include the annular outer layer 120.

In order to extend the wellbore 100 into the subterranean formation 105, a drill string 125 is used in a well known manner to drill out material from the subterranean formation 105 to form a new wellbore section 130.

As illustrated in FIG. 2, an apparatus 200 for forming a wellbore casing in a subterranean formation is then positioned in the new section 130 of the wellbore

100. The apparatus 200 includes an expansion cone 205 having a fluid passage 205a that supports a tubular member 210 that includes a lower portion 210a, an intermediate portion 210b, an upper portion 210c, and an upper end portion 210d.

The expansion cone 205 may be any number of conventional commercially available expansion cones. For example, the expansion cone 205 may be
5 controllably expandable in the radial direction, for example, as disclosed in U.S. patent nos. 5,348,095, and/or 6,012,523, the disclosures of which are incorporated herein by reference.

The tubular member 210 may be fabricated from any number of conventional
10 commercially available materials such as, for example, Oilfield Country Tubular Goods (OCTG), 13 chromium steel tubing/casing, or plastic tubing/casing. The tubular member 210 is preferably fabricated from OCTG in order to maximize strength after expansion. Alternatively, the tubular member 210 may be solid and/or slotted. The length of the tubular member 210 is limited to minimize the possibility
15 of buckling. For typical tubular member 210 materials, the length of the tubular member 210 is preferably limited to between about 40 to 20,000 feet in length.

The lower portion 210a of the tubular member 210 has a larger inside diameter than the upper portion 210c of the tubular member. The wall thickness of the intermediate portion 210b of the tubular member 201 is less than the wall
20 thickness of the upper portion 210c of the tubular member in order to facilitate the initiation of the radial expansion process. The upper end portion 210d of the tubular member 210 is slotted, perforated, or otherwise modified to catch or slow down the expansion cone 205 when it completes the extrusion of tubular member 210.

A shoe 215 is coupled to the lower portion 210a of the tubular member. The
25 shoe 215 includes a valveable fluid passage 220 that is adapted to receive a plug, dart, or other similar element for controllably sealing the fluid passage 220. In this manner, the fluid passage 220 may be optimally sealed off by introducing a plug, dart and/or ball sealing elements into the fluid passage 240.

The shoe 215 may be one of any number of conventional commercially
30 available shoes such as, for example, Super Seal II float shoe, Super Seal II Down-

Jet float shoe or a guide shoe with a sealing sleeve for a latch down plug modified in accordance with the teachings of the present disclosure. In a preferred arrangement, the shoe 215 is an aluminum down-jet guide shoe with a sealing sleeve for a latch-down plug available from Halliburton Energy Services in Dallas, TX, modified in
5 accordance with the teachings of the present disclosure, in order to optimally guide the tubular member 210 in the wellbore, optimally provide an adequate seal between the interior and exterior diameters of the overlapping joint between the tubular members, and to optimally allow the complete drill out of the shoe and plug after the completion of the cementing and expansion operations.

10 The shoe 215 further includes one or more through and side outlet ports in fluidic communication with the fluid passage 220. In this manner, the shoe 215 optimally injects hardenable fluidic sealing material into the region outside the shoe 215 and tubular member 210.

A support member 225 having fluid passages 225a and 225b is coupled to the
15 expansion cone 205 for supporting the apparatus 200. The fluid passage 225a is preferably fluidically coupled to the fluid passage 205a. In this manner, fluidic materials may be conveyed to and from a region 230 below the expansion cone 205 and above the bottom of the shoe 215. The fluid passage 225b is fluidically coupled to the fluid passage 225a and includes a conventional control valve. In this manner,
20 during placement of the apparatus 200 within the wellbore 100, surge pressures can be relieved by the fluid passage 225b. The support member 225 further includes one or more conventional centralizers (not illustrated) to help stabilize the apparatus 200.

During placement of the apparatus 200 within the wellbore 100, the fluid
passage 225a is selected to transport materials such as, for example, drilling mud or
25 formation fluids at flow rates and pressures ranging from about 0 to 11.355
 m^3/minute (0 to 3,000 gallons/minute) and 0 to $62.052 \times 10^3 \text{ KPa}$ (0 to 9,000 psi) in order to minimize drag on the tubular member being run and to minimize surge pressures exerted on the wellbore 130 which could cause a loss of wellbore fluids and lead to hole collapse. During placement of the apparatus 200 within the
30 wellbore 100, the fluid passage 225b is preferably selected to convey fluidic

)
materials at flow rates and pressures ranging from about 0 to 11.355 m³/minute (0 to 3,000 gallons/minute) and 0 to 62.052 x 10³ KPa (0 to 9,000 psi) in order to reduce the drag on the apparatus 200 during insertion into the new section 130 of the wellbore 100 and to minimize surge pressures on the new wellbore section 130.

5 A lower cup seal 235 is coupled to and supported by the support member 225. The lower cup seal 235 prevents foreign materials from entering the interior region of the tubular member 210 adjacent to the expansion cone 205. The lower cup seal 235 may be one of any number of conventional commercially available cup seals such as, for example, TP cups, or Selective Injection Packer (SIP) cups
10 modified in accordance with the teachings of the present disclosure. In a preferred arrangement, the lower cup seal 235 is a SIP cup seal, available from Halliburton Energy Services in Dallas, TX in order to optimally block foreign material and contain a body of lubricant.

 The upper cup seal 240 is coupled to and supported by the support member
15 225. The upper cup seal 240 prevents foreign materials from entering the interior region of the tubular member 210. The upper cup seal 240 may be one of any number of conventional commercially available cup seals such as, for example, TP cups or SIP cups modified in accordance with the teachings of the present disclosure. In a preferred arrangement, the upper cup seal 240 is a SIP cup,
20 available from Halliburton Energy Services in Dallas, TX in order to optimally block the entry of foreign materials and contain a body of lubricant.

 One or more sealing members 245 are coupled to and supported by the exterior surface of the upper end portion 210d of the tubular member 210. The seal members 245 provide an overlapping joint between the lower end portion 115a of
25 the casing 115 and the portion 260 of the tubular member 210 to be fluidically sealed. The sealing members 245 may be selected from any number of conventional commercially available seals such as, for example, lead, rubber, Teflon^(RTM), or epoxy seals modified in accordance with the teachings of the present disclosure. The sealing members 245 are preferably molded from Stratalock epoxy available
30 from Halliburton Energy Services in Dallas, TX in order to optimally provide a load

bearing interference fit between the upper end portion 210d of the tubular member 210 and the lower end portion 115a of the existing casing 115.

The sealing members 245 are selected to optimally provide a sufficient frictional force to support the expanded tubular member 210 from the existing casing 115. The frictional force optimally provided by the sealing members 245 ranges from about 4.448×10^3 to 4.448×10^6 N (1,000 to 1,000,000 lbf) in order to optimally support the expanded tubular member 210.

A quantity of lubricant 250 is provided in the annular region above the expansion cone 205 within the interior of the tubular member 210. In this manner, the extrusion of the tubular member 210 off of the expansion cone 205 is facilitated. The lubricant 250 may be any number of conventional commercially available lubricants such as, for example, Lubriplate^(RTM), chlorine based lubricants, oil based lubricants or Climax 1500 Antisieze (3100). In a preferred arrangement, the lubricant 250 is Climax 1500 Antisieze (3100) available from Climax Lubricants and Equipment Co. in Houston, TX in order to optimally provide optimum lubrication to facilitate the expansion process.

The support member 225 is thoroughly cleaned prior to assembly to the remaining portions of the apparatus 200. In this manner, the introduction of foreign material into the apparatus 200 is minimized. This minimizes the possibility of foreign material clogging the various flow passages and valves of the apparatus 200.

Before or after positioning the apparatus 200 within the new section 130 of the wellbore 100, a couple of wellbore volumes are circulated in order to ensure that no foreign materials are located within the wellbore 100 that might clog up the various flow passages and valves of the apparatus 200 and to ensure that no foreign material interferes with the expansion process.

As illustrated in FIG. 2, during placement of the apparatus 200 within the wellbore 100, fluidic materials 255 within the wellbore that are displaced by the apparatus are conveyed through the fluid passages 220, 205a, 225a, and 225b. In this manner, surge pressures created by the placement of the apparatus within the wellbore 100 are reduced.

As illustrated in FIG. 3, the fluid passage 225b is then closed and a hardenable fluidic sealing material 305 is then pumped from a surface location into the fluid passages 225a and 205a. The material 305 then passes from the fluid passage 205a into the interior region 230 of the tubular member 210 below the expansion cone 205. The material 305 then passes from the interior region 230 into the fluid passage 220. The material 305 then exits the apparatus 200 and fills an annular region 310 between the exterior of the tubular member 210 and the interior wall of the new section 130 of the wellbore 100. Continued pumping of the material 305 causes the material 305 to fill up at least a portion of the annular region 310.

The material 305 is preferably pumped into the annular region 310 at pressures and flow rates ranging, for example, from about 0 to 34.474×10^3 KPa (0 to 5000 psi) and 0 to 5.6775 m³/minute (0 to 1,500 gallons/min), respectively. The optimum flow rate and operating pressures vary as a function of the casing and wellbore sizes, wellbore section length, available pumping equipment, and fluid properties of the fluidic material being pumped. The optimum flow rate and operating pressure are preferably determined using conventional empirical methods.

The hardenable fluidic sealing material 305 may be any number of conventional commercially available hardenable fluidic sealing materials such as, for example, slag mix, cement or epoxy. In a preferred arrangement, the hardenable fluidic sealing material 305 is a blended cement prepared specifically for the particular well section being drilled from Halliburton Energy Services in Dallas, TX in order to provide optimal support for tubular member 210 while also maintaining optimum flow characteristics so as to minimize difficulties during the displacement of cement in the annular region 315. The optimum blend of the blended cement is preferably determined using conventional empirical methods. In several alternative arrangements, the hardenable fluidic sealing material 305 is compressible before, during, or after curing.

The annular region 310 is filled with the material 305 in sufficient quantities to ensure that, upon radial expansion of the tubular member 210, the annular region 310 of the new section 130 of the wellbore 100 will be filled with the material 305.

As illustrated in FIG. 4, once the annular region 310 has been adequately filled with the material 305, a plug 405, or other similar device, is introduced into the fluid passage 220, thereby fluidically isolating the interior region 230 from the annular region 310. A non-hardenable fluidic material 315 is then pumped into the interior region 230 causing the interior region to pressurize. In this manner, the interior region 230 of the expanded tubular member 210 will not contain significant amounts of cured material 305. This also reduces and simplifies the cost of the entire process. Alternatively, the material 305 may be used during this phase of the process.

Once the interior region 230 becomes sufficiently pressurized, the tubular member 210 is plastically deformed, radially expanded, and extruded off of the expansion cone 205. During the extrusion process, the expansion cone 205 may be raised out of the expanded portion of the tubular member 210. During the extrusion process, the expansion cone 205 is raised at approximately the same rate as the tubular member 210 is expanded in order to keep the tubular member 210 stationary relative to the new wellbore section 130. In an alternative preferred arrangement, the extrusion process is commenced with the tubular member 210 positioned above the bottom of the new wellbore section 130, keeping the expansion cone 205 stationary, and allowing the tubular member 210 to extrude off of the expansion cone 205 and into the new wellbore section 130 under the force of gravity and the operating pressure of the interior region 230.

The plug 405 is placed into the fluid passage 220 by introducing the plug 405 into the fluid passage 225a at a surface location in a conventional manner. The plug 405 acts to fluidically isolate the hardenable fluidic sealing material 305 from the non hardenable fluidic material 315.

The plug 405 may be one of any number of conventional commercially available devices for plugging a fluid passage such as, for example, Multiple Stage Cementer (MSC) latch-down plug, Omega latch-down plug or three-wiper latch-down plug modified in accordance with the teachings of the present disclosure. Preferably, the plug 405 is a MSC latch-down plug available from Halliburton

Energy Services in Dallas, TX.

After placement of the plug 405 in the fluid passage 220, the non hardenable fluidic material 315 is preferably pumped into the interior region 310 at pressures and flow rates ranging, for example, from approximately 2.758×10^3 to 68.947×10^3 KPa (400 to 10,000 psi) and 113.55×10^{-3} to $15.14 \text{ m}^3/\text{minute}$ (30 to 4,000 gallons/min). In this manner, the amount of hardenable fluidic sealing material within the interior 230 of the tubular member 210 is minimized. After placement of the plug 405 in the fluid passage 220, the non hardenable material 315 is preferably pumped into the interior region 230 at pressures and flow rates ranging from approximately 3.447×10^3 to 62.052×10^3 KPa (500 to 9,000 psi) and 151.4×10^{-3} to $11.355 \text{ m}^3/\text{minute}$ (40 to 3,000 gallons/min) in order to maximize the extrusion speed.

The apparatus 200 is adapted to minimize tensile, burst, and friction effects upon the tubular member 210 during the expansion process. These effects will be depend upon the geometry of the expansion cone 205, the material composition of the tubular member 210 and expansion cone 205, the inner diameter of the tubular member 210, the wall thickness of the tubular member 210, the type of lubricant, and the yield strength of the tubular member 210. In general, the thicker the wall thickness, the smaller the inner diameter, and the greater the yield strength of the tubular member 210, then the greater the operating pressures required to extrude the tubular member 210 off of the expansion cone 205.

For typical tubular members 210, the extrusion of the tubular member 210 off of the expansion cone 205 will begin when the pressure of the interior region 230 reaches, for example, approximately 3.447×10^3 to 62.052×10^3 KPa (500 to 9,000 psi).

During the extrusion process, the expansion cone 205 may be raised out of the expanded portion of the tubular member 210 at rates ranging, for example, from about 0 to 1.524 m/sec (0 to 5 ft/sec). In a preferred arrangement, during the extrusion process, the expansion cone 205 is raised out of the expanded portion of the tubular member 210 at rates ranging from about 0 to $609.6 \times 10^{-3} \text{ m/s}$ (0 to 2

ft/sec) in order to minimize the time required for the expansion process while also permitting easy control of the expansion process.

When the upper end portion 210d of the tubular member 210 is extruded off of the expansion cone 205, the outer surface of the upper end portion 210d of the tubular member 210 will preferably contact the interior surface of the lower end portion 115a of the casing 115 to form an fluid tight overlapping joint. The contact pressure of the overlapping joint may range, for example, from approximately 344.7 to 137.89 KPa (50 to 20,000 psi). In a preferred arrangement, the contact pressure of the overlapping joint ranges from approximately 2.758×10^3 to 68.947×10^3 KPa (400 to 10,000 psi) in order to provide optimum pressure to activate the annular sealing members 245 and optimally provide resistance to axial motion to accommodate typical tensile and compressive loads.

The overlapping joint between the existing casing 115 and the radially expanded tubular member 210 provides a gaseous and fluidic seal. The sealing members 245 optimally provide a fluidic and gaseous seal in the overlapping joint. Alternatively, the sealing members 245 are omitted.

The operating pressure and flow rate of the non-hardenable fluidic material 315 is controllably ramped down when the expansion cone 205 reaches the upper end portion 210d of the tubular member 210. In this manner, the sudden release of pressure caused by the complete extrusion of the tubular member 210 off of the expansion cone 205 can be minimized. The operating pressure is reduced in a substantially linear fashion from 100% to about 10% during the end of the extrusion process beginning when the expansion cone 205 is within about 1.524 m (5 feet) from completion of the extrusion process.

Alternatively, or in combination, a shock absorber is provided in the support member 225 in order to absorb the shock caused by the sudden release of pressure. The shock absorber may, for example, be any conventional commercially available shock absorber adapted for use in wellbore operations.

Alternatively, or in combination, an expansion cone catching structure is provided in the upper end portion 210d of the tubular member 210 in order to catch

or at least decelerate the expansion cone 205.

Once the extrusion process is completed, the expansion cone 205 is removed from the wellbore 100. Either before or after the removal of the expansion cone 205, the integrity of the fluidic seal of the overlapping joint between the upper end portion 210d of the tubular member 210 and the lower end portion 115a of the preexisting wellbore casing 115 is tested using conventional methods.

If the fluidic seal of the overlapping joint between the upper end portion 210d of the tubular member 210 and the lower end portion 115a of the casing 115 is satisfactory, then any uncured portion of the material 305 within the expanded tubular member 210 is then removed in a conventional manner such as, for example, circulating the uncured material out of the interior of the expanded tubular member 210. The expansion cone 205 is then pulled out of the wellbore section 130 and a drill bit or mill is used in combination with a conventional drilling assembly 505 to drill out any hardened material 305 within the tubular member 210. The material 305 within the annular region 310 is then allowed to fully cure.

As illustrated in Fig. 5, any remaining cured material 305 within the interior of the expanded tubular member 210 is then removed in a conventional manner using a conventional drill string 505. The resulting new section of casing 510 includes the expanded tubular member 210 and an outer annular layer 515 of the cured material 305.

As illustrated in FIG. 6, the bottom portion of the apparatus 200 including the shoe 215 and dart 405 may then be removed by drilling out the shoe 215 and dart 405 using conventional drilling methods.

As illustrated in FIG. 7, an apparatus 600 for forming a mono-diameter wellbore casing is then positioned within the wellbore casing 115 proximate the tubular member 210 that includes an expansion cone 605 and a support member 610. The outside diameter of the expansion cone 605 is substantially equal to the inside diameter of the wellbore casing 115. The apparatus 600 further includes a fluid passage 615 for conveying fluidic materials 620 out of the wellbore 100 that are displaced by the placement and operation of the expansion cone 605.

The expansion cone 605 is then driven downward using the support member 610 in order to radially expand and plastically deform the tubular member 210 and the overlapping portion of the tubular member 115. In this manner, as illustrated in FIG. 8, a mono-diameter wellbore casing is formed that includes the overlapping wellbore casings 115 and 210. Alternatively, the secondary radial expansion process is performed before, during, or after the material 515 fully cures. A conventional expansion device including rollers may be substituted for, or used in combination with, the apparatus 600.

More generally, as illustrated in FIG. 9, the method of FIGS. 1-8 is repeatedly performed in order to provide a mono-diameter wellbore casing that includes overlapping wellbore casings 115 and 210a-210e. The wellbore casing 115, and 210a-210e preferably include outer annular layers of fluidic sealing material. In this manner, a mono-diameter wellbore casing may be formed within the subterranean formation that extends for tens of thousands of feet. More generally still, the teachings of FIGS. 1-9 may be used to form a mono-diameter wellbore casing, a pipeline, a structural support, or a tunnel within a subterranean formation at any orientation from the vertical to the horizontal.

The formation of a mono-diameter wellbore casing, as illustrated in FIGS. 1-9, is further provided as disclosed in one or more of the following: (1) U.S. patent application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, (2) U.S. patent application serial no. 09/510,913, attorney docket no. 25791.7.02, filed on 2/23/2000, (3) U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, (4) U.S. patent application serial no. 09/440,338, attorney docket no. 25791.9.02, filed on 11/15/1999, (5) U.S. patent application serial no. 09/523,460, attorney docket no. 25791.11.02, filed on 3/10/2000, (6) U.S. patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, (7) U.S. patent application serial no. 09/511,941, attorney docket no. 25791.16.02, filed on 2/24/2000, (8) U.S. patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, (9) U.S. patent application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on

4/26/2000, (10) PCT patent application serial no. PCT/US00/18635, attorney docket no. 25791.25.02, filed on 7/9/2000, (11) U.S. provisional patent application serial no. 60/162,671, attorney docket no. 25791.27, filed on 11/1/1999, (12) U.S. provisional patent application serial no. 60/154,047, attorney docket no. 25791.29, filed on 9/16/1999, (13) U.S. provisional patent application serial no. 60/159,082, attorney docket no. 25791.34, filed on 10/12/1999, (14) U.S. provisional patent application serial no. 60/159,039, attorney docket no. 25791.36, filed on 10/12/1999, (15) U.S. provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (16) U.S. provisional patent application serial no. 60/212,359, attorney docket no. 25791.38, filed on 6/19/2000, (17) U.S. provisional patent application serial no. 60/165,228, attorney docket no. 25791.39, filed on 11/12/1999, (18) U.S. provisional patent application serial no. 60/221,443, attorney docket no. 25791.45, filed on 7/28/2000, (19) U.S. provisional patent application serial no. 60/221,645, attorney docket no. 25791.46, filed on 7/28/2000, (20) U.S. provisional patent application serial no. 60/233,638, attorney docket no. 25791.47, filed on 9/18/2000, (21) U.S. provisional patent application serial no. 60/237,334, attorney docket no. 25791.48, filed on 10/2/2000, and (22) U.S. provisional patent application serial no. _____, attorney docket no. 25791.52, filed on 1/3/2001, the disclosures of which are incorporated herein by reference.

Alternatively, the fluid passage 220 in the shoe 215 is omitted. In this manner, the pressurization of the region 230 is simplified. Alternatively, the annular body 515 of the fluidic sealing material is formed using conventional methods of injecting a hardenable fluidic sealing material into the annular region 310.

Referring to FIGS. 10-11, in an alternative arrangement, an apparatus 700 for forming a mono-diameter wellbore casing is positioned within the wellbore casing 115 that includes an expansion cone 705 having a fluid passage 705a that is coupled to a support member 710.

The expansion cone 705 preferably further includes a conical outer surface 705b for radially expanding and plastically deforming the overlapping portion of the tubular member 115 and the tubular member 210. The outside diameter of the

expansion cone 705 is substantially equal to the inside diameter of the pre-existing wellbore casing 115.

The support member 710 is coupled to a slip joint 715, and the slip joint is coupled to a support member 720. As will be recognized by persons having
5 ordinary skill in the art, a slip joint permits relative movement between objects. Thus, in this manner, the expansion cone 705 and support member 710 may be displaced in the longitudinal direction relative to the support member 720. The slip joint 710 permits the expansion cone 705 and support member 710 to be displaced in the longitudinal direction relative to the support member 720 for a distance greater
10 than or equal to the axial length of the tubular member 210. In this manner, the expansion cone 705 may be used to plastically deform and radially expand the overlapping portion of the tubular member 115 and the tubular member 210 without having to reposition the support member 720.

The slip joint 715 may be any number of conventional commercially
15 available slip joints that include a fluid passage for conveying fluidic materials through the slip joint. In a preferred arrangement, the slip joint 715 is a pumper sub commercially available from Bowen Oil Tools in order to optimally provide elongation of the drill string.

The support member 710, slip joint 715, and support member 720 further
20 include fluid passages 710a, 715a, and 720a, respectively, that are fluidically coupled to the fluid passage 705a. During operation, the fluid passages 705a, 710a, 715a, and 720a preferably permit fluidic materials 725 displaced by the expansion cone 705 to be conveyed to a location above the apparatus 700. In this manner, operating pressures within the subterranean formation 105 below the expansion cone are
25 minimized.

The support member 720 further preferably includes a fluid passage 720b that permits fluidic materials 730 to be conveyed into an annular region 735 surrounding the support member 710, the slip joint 715, and the support member 720 and bounded by the expansion cone 705 and a conventional packer 740 that is
30 coupled to the support member 720. In this manner, the annular region 735 may be

pressurized by the injection of the fluids 730 thereby causing the expansion cone 705 to be displaced in the longitudinal direction relative to the support member 720 to thereby plastically deform and radially expand the overlapping portion of the tubular member 115 and the tubular member 210.

- 5 During operation, as illustrated in FIG. 10, the apparatus 700 is positioned within the preexisting casing 115 with the bottom surface of the expansion cone 705 proximate the top of the tubular member 210. During placement of the apparatus 700 within the preexisting casing 115, fluidic materials 725 within the casing are conveyed out of the casing through the fluid passages 705a, 710a, 715a, and 720a.
- 10 In this manner, surge pressures within the wellbore 100 are minimized.

- The packer 740 is then operated in a well-known manner to fluidically isolate the annular region 735 from the annular region above the packer. The fluidic material 730 is then injected into the annular region 735 using the fluid passage 720b. Continued injection of the fluidic material 730 into the annular region 735
- 15 preferably pressurizes the annular region and thereby causes the expansion cone 705 and support member 710 to be displaced in the longitudinal direction relative to the support member 720.

- As illustrated in FIG. 11, the longitudinal displacement of the expansion cone 705 in turn plastically deforms and radially expands the overlapping portion of the
- 20 tubular member 115 and the tubular member 210. In this manner, a mono-diameter wellbore casing is formed that includes the overlapping wellbore casings 115 and 210. The apparatus 700 may then be removed from the wellbore 100 by releasing the packer 740 from engagement with the wellbore casing 115, and lifting the apparatus 700 out of the wellbore 100.

- 25 In an alternative arrangement of the apparatus 700, the fluid passage 720b is provided within the packer 740 in order to enhance the operation of the apparatus 700.

- Alternatively, the fluid passages 705a, 710a, 715a, and 720a are omitted. In this manner, the region of the wellbore 100 below the expansion cone 705 is
- 30 pressurized and one or more regions of the subterranean formation 105 are fractured

to enhance the oil and/or gas recovery process.

Referring to FIGS. 12-15, an apparatus 800 is positioned within the wellbore casing 115 that includes an expansion cone 805 having a fluid passage 805a that is releasably coupled to a releasable coupling 810 having fluid passage 810a.

5 The fluid passage 805a is preferably adapted to receive a conventional ball, plug, or other similar device for sealing off the fluid passage. The expansion cone 805 further includes a conical outer surface 805b for radially expanding and plastically deforming the overlapping portion of the tubular member 115 and the tubular member 210. In a preferred arrangement, the outside diameter of the
10 expansion cone 805 is substantially equal to the inside diameter of the pre-existing wellbore casing 115.

The releasable coupling 810 may be any number of conventional commercially available releasable couplings that include a fluid passage for conveying fluidic materials through the releasable coupling. In a preferred
15 arrangement, the releasable coupling 810 is a safety joint commercially available from Halliburton in order to optimally release the expansion cone 805 from the support member 815 at a predetermined location.

A support member 815 is coupled to the releasable coupling 810 that includes a fluid passage 815a. The fluid passages 805a, 810a and 815a are fluidically
20 coupled. In this manner, fluidic materials may be conveyed into and out of the wellbore 100.

A packer 820 is movably and sealingly coupled to the support member 815. The packer may be any number of conventional packers. In a preferred arrangement, the packer 820 is a commercially available burst preventer (BOP) in
25 order to optimally provide a sealing member.

During operation, as illustrated in FIG. 12, the apparatus 800 is positioned within the preexisting casing 115 with the bottom surface of the expansion cone 805 proximate the top of the tubular member 210. During placement of the apparatus 800 within the preexisting casing 115, fluidic materials 825 within the casing are
30 conveyed out of the casing through the fluid passages 805a, 810a, and 815a. In this

manner, surge pressures within the wellbore 100 are minimized. The packer 820 is then operated in a well-known manner to fluidically isolate a region 830 within the casing 115 between the expansion cone 805 and the packer 820 from the region above the packer.

5 As illustrated in FIG. 13, the releasable coupling 810 is then released from engagement with the expansion cone 805 and the support member 815 is moved away from the expansion cone. A fluidic material 835 may then be injected into the region 830 through the fluid passages 810a and 815a. The fluidic material 835 may then flow into the region of the wellbore 100 below the expansion cone 805 through
10 the valveable passage 805b. Continued injection of the fluidic material 835 may thereby pressurize and fracture regions of the formation 105 below the tubular member 210. In this manner, the recovery of oil and/or gas from the formation 105 may be enhanced.

 As illustrated in FIG. 14, a plug, ball, or other similar valve device 840 may
15 then be positioned in the valveable passage 805a by introducing the valve device into the fluidic material 835. In this manner, the region 830 may be fluidically isolated from the region below the expansion cone 805. Continued injection of the fluidic material 835 may then pressurize the region 830 thereby causing the expansion cone 805 to be displaced in the longitudinal direction.

20 As illustrated in FIG. 15, the longitudinal displacement of the expansion cone 805 plastically deforms and radially expands the overlapping portion of the pre-existing wellbore casing 115 and the tubular member 210. In this manner, a mono-diameter wellbore casing is formed that includes the pre-existing wellbore casing 115 and the tubular member 210. Upon completing the radial expansion process,
25 the support member 815 may be moved toward the expansion cone 805 and the expansion cone may be re-coupled to the releasable coupling device 810. The packer 820 may then be decoupled from the wellbore casing 115, and the expansion cone 805 and the remainder of the apparatus 800 may then be removed from the wellbore 100.

30 In a preferred arrangement, the displacement of the expansion cone 805 also

14 2 05

pressurizes the region within the tubular member 210 below the expansion cone. In this manner, the subterranean formation surrounding the tubular member 210 may be elastically or plastically compressed thereby enhancing the structural properties of the formation.

- 5 Although illustrative embodiments of the invention have been shown and described, a wide range of modification, changes and substitution is contemplated in the foregoing disclosure within the scope of the claims. Accordingly, it is appropriate that the appended claims be construed broadly.

10

Claims

1. A method of radially expanding an overlapping joint between a wellbore casing and a tubular liner, comprising:
- positioning an expansion cone within the wellbore casing above the
- 5 overlapping joint;
- sealing off a region within the wellbore casing above the expansion cone;
- releasing the expansion cone;
- displacing the expansion cone by pressurizing an annular region; and
- pressurizing the interior of the tubular liner.
- 10
2. An apparatus for radially expanding an overlapping joint between a wellbore casing and a tubular liner, comprising:
- means for positioning an expansion cone within the wellbore casing above the
- overlapping joint;
- 15 means for sealing off a region within the wellbore casing above the expansion cone;
- means for releasing the expansion cone;
- means for displacing the expansion cone by pressurizing an annular region;
- and
- 20 means for pressurizing the interior of the tubular liner.
3. A method of radially expanding an overlapping joint between first and second tubular members, comprising:
- positioning an expansion cone within the first tubular member above the
- 25 overlapping joint;
- sealing off a region within the first tubular member above the expansion cone;
- releasing the expansion cone;
- displacing the expansion cone by pressurizing an annular region; and
- pressurizing the interior of the second tubular member.

30

14 4 05

4. An apparatus for radially expanding an overlapping joint between first and second tubular members, comprising:
- means for positioning an expansion cone within the first tubular member above the overlapping joint;
 - 5 means for sealing off a region within the first tubular member above the expansion cone;
 - means for releasing the expansion cone;
 - means for displacing the expansion cone by pressurizing an annular region;
 - and
 - 10 means for pressurizing the interior of the second tubular member.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.